
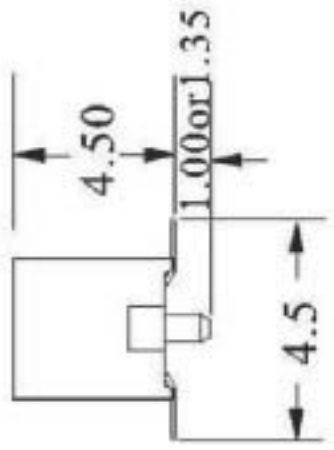
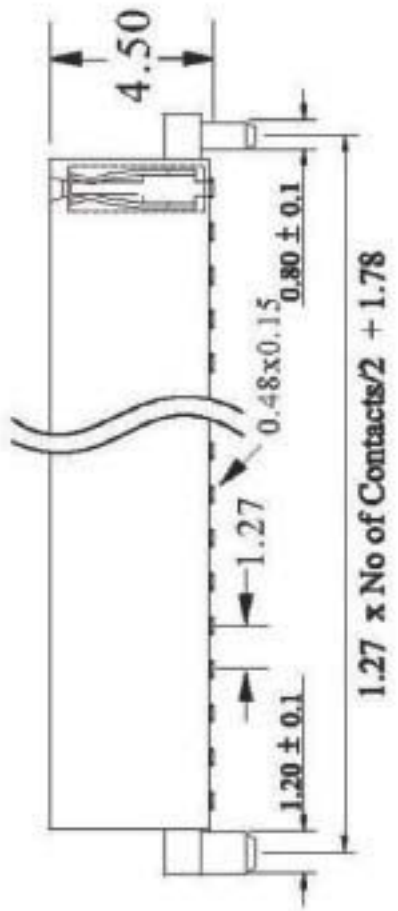


CUSTOMER COPY

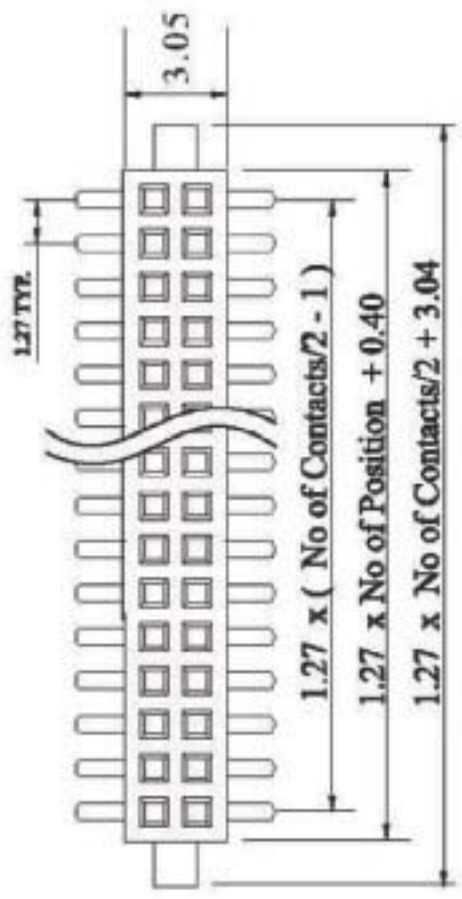

***Order Information**

18676 50 XX X

2 : 半金錫
3 : 全金

No. of Contact


SPECIFICATIONS

Current rating : 1 Amps
Dielectric Withstanding : AC 500V
Contact resistance : 20 Milliohms Max.
Insulation resistance : 5000 Megohms Min.
Temperature range : $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

MATERIAL :

Housing : High Temperature Thermoplastic
Terminal : Phosphor Bronze

Recommended P.C.Board Hole Layout :

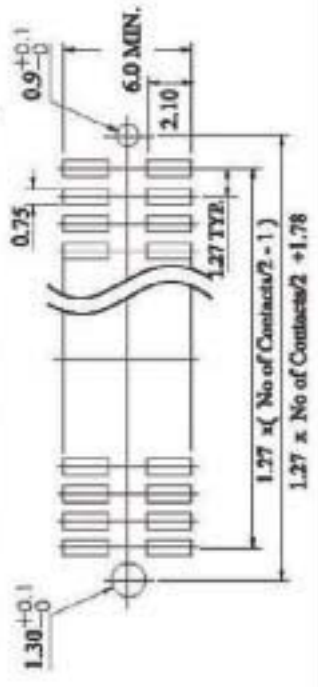

Wellco T&C Co., Ltd.

REV.	DESCRIPTION	APP.	DATE
A	NEW DESIGN		

0.0±0.30	SCALE:	TITLE:	PART NO:
0.00±0.20	UNIT: mm	1.27x1.27mm Dual Row Female Header SMD Series	APP BY: Hung
0.000±0.1			CHK BY: Cheryl
		MATL: ROHS (L. C. P.)	DR BY: ADET A225
		DWG. NO. C1867650XXX	