
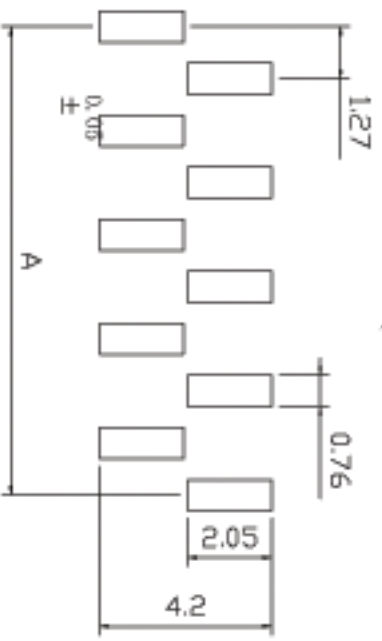
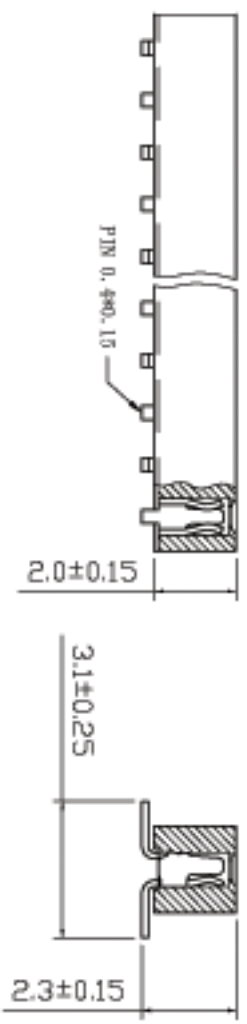


A	1.27 x No. of Contacts 1.27
B	1.27 x No. of Positions

SPECIFICATION

Current Rating: 1 Amps
 Withstanding Voltage: AC 500V
 Insulation Resistance: 1000MΩ Min
 Contact Resistance: 20m
 Operation Temperature: -40
 Insulator Material: Polyester (UL94V-0)
 Standard: 6T
 Contact Material: Brass
 Contact Plating: Au or SN over 50n" NI
 Max. Processing Temp: 230 (260)

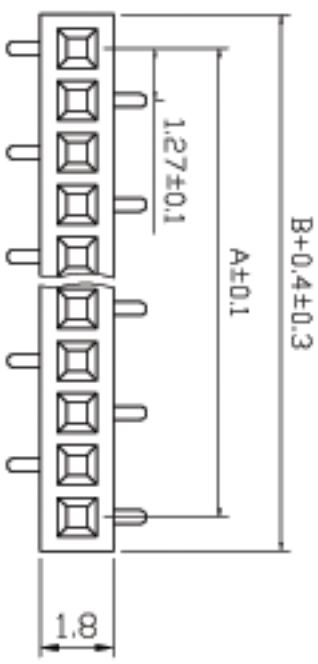

RECOMMEND P. C. BOARD LAYOUT

2420 1 XX G0 X S U 01

Plastics Height 20=2.0mm 34=3.4mm 43=4.3mm 46=4.6mm 85=8.5mm .	No. of Rows 1=Single Row 2=Dual Row .	No. of Pins Per Row 1K50 2=50 .	Contact Plating SN: Tin G0: Gold Flash G2: 50" Gold G3: 100" Gold G4: 150" Gold G5: 300" Gold S0: Gold Flash/Tin Standard: G0	Insulator Material Option A BK-PBT B BK-PA66 C BK-PA6T D BK-PA46 F KB-LCP S Special	Connector Type S=Straitght R=Right Angle M=SMT .
--	--	--	--	---	--

Welico T&C Co., Ltd.

DRAWING NAME: 1.27PP 1xNPin R2.0 SMT 右前左后	
DATE: 04/10/10	
SIZE: A4	SCALE: 1:1
REV: A	UNIT: mm
CHECKED:	PROJECT:
DATE:	DATE:
APPROVED:	DATE:
PAGE: 1/1	