

### Specification

Insulator Material: Polyesetr, UL94V-0

Standard: Nylon-6T

Contact Material: Brass

Contact plated: Gold Over Nickel


Current Rating : 1 Amp

Contact Resistance: 20 Milliohms Max

Insulation Resistance : 1000M $\Omega$  Min.

Dielectric withstanding Voltage: AC 500V

Operation Temperature : -40 $^{\circ}$ C -- +105 $^{\circ}$ C

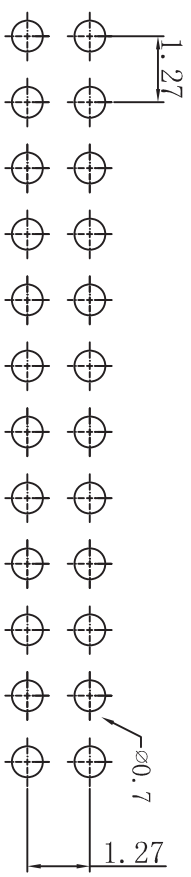

### PCB LAYOUT

#### TOLERANCE TABLE

.0	$\pm 0.20$
.00	$\pm 0.10$
.000	$\pm 0.05$

APPROVED:	DATE:	<b>Wellco T&amp;C Co., Ltd.</b>
CHECKED:	DATE:	
DRAWN:	DATE:	TITLE:
LXF	2008-04-29	210-1S-2*XP 2.8/1.0/2.0
CLIENT P/N /		UNIT mm
SCALE Free		REV. A
FILE NO. Ckmtw-210-10002		