
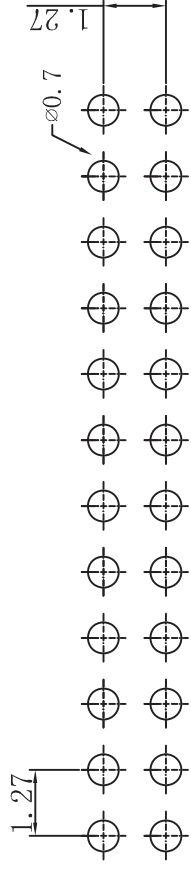
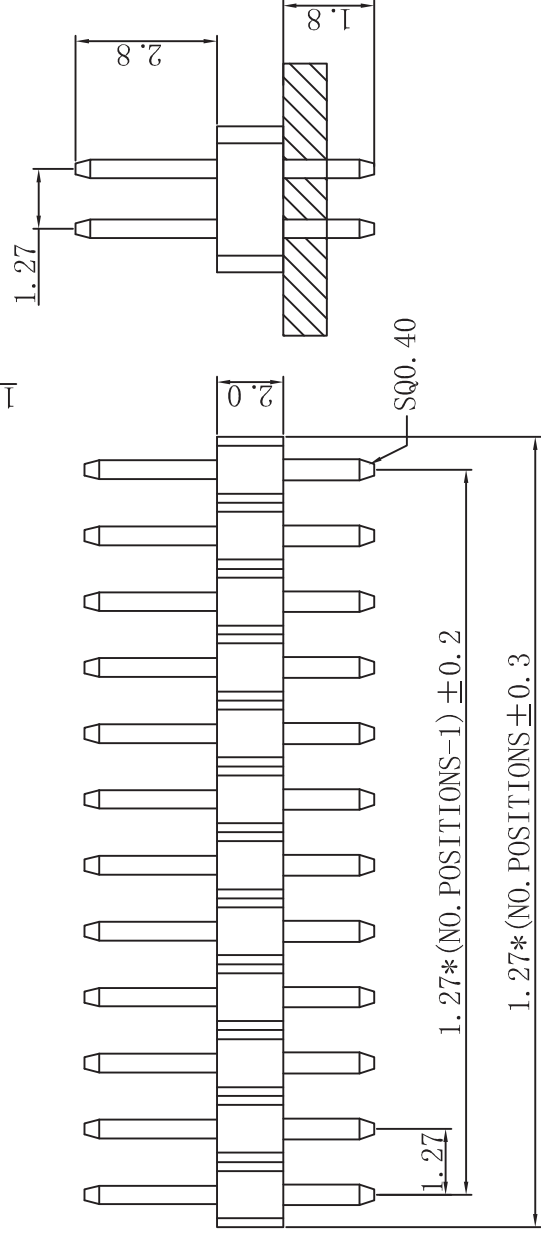


Specification

Insulator Material: Polyesetr, UL94V-0
 Standard: Nylon-6T
 Contact Material: Brass
 Contact plated: Gold Over Nickel
 Current Rating : 1Amp
 Contact Resistance: 20 Milliohms Max
 Insulation Resistance : 1000MΩ Min.
 Dielectric withstanding Voltage: AC 500V
 Operation Temperature : -40°C -- +105°C

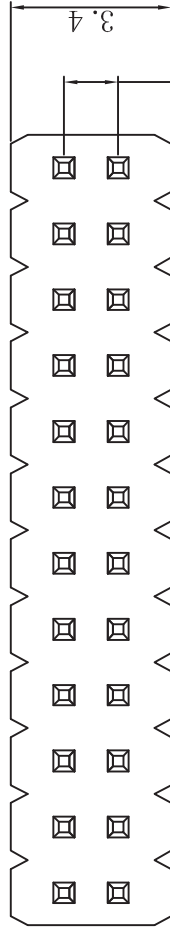

APPROVED:	DATE:	Wellco T&C Co., Ltd.	
CHECKED:	DATE:	TITLE: 210-1S-2*XP 2.8/1.0/2.0	
DRAWN:	DATE:	CLIENT P/N /	
LYF	2008-04-29	UNIT mm	SCALE free
		FILE NO. Ckmtw-210-10002	REV. A

TOLERANCE TABLE	
.0	±0.20
.00	±0.10
.000	±0.05

PCB LAYOUT