
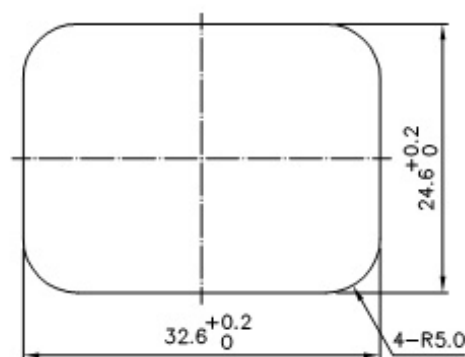
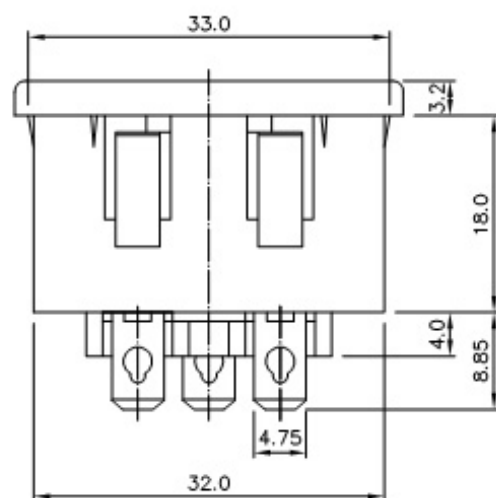
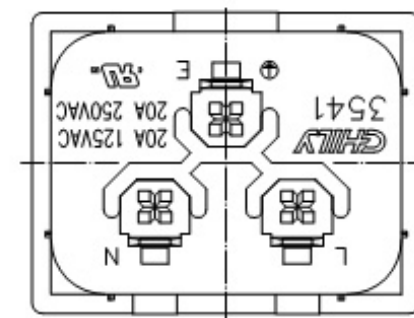
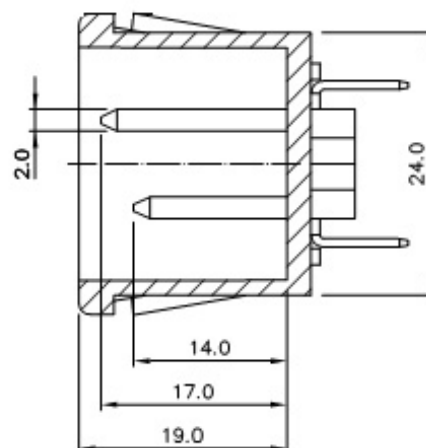


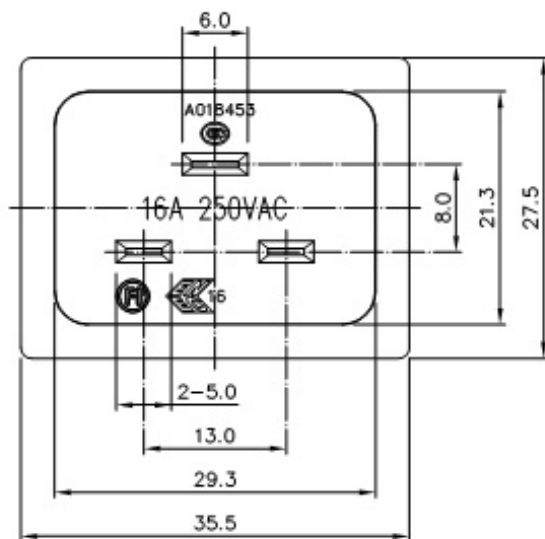

MOUNTING CUTOUT
PANEL THICK : 1.5 mm

1.RATING : 20A 125/250V~ (UL,C-UL) .
16A 250V~ (ENEC) .

2.DIELECTRIC STRENGTH : MUST WITHSTAND 2000V RMS 50 OR 60 Hz
FOR 1 MINUTE BETWEEN EACH TERMINAL.

CB NO : FI 6584
ENEC NO : ENEC/FI 2011010
UL NO : E68036
C-UL NO : E68036

符合RoHS2.0要求

DRAWING NO.

PRODUCT NO.	REVISION	DATE	DESCRIPTION
AC SOCKET	B	MAR. 28. 2012	NEW DRAWING
PART NO.			
3541-M1C01T3			

UNIT : mm

TOLERANCE:

X.000	±0.1
X.00	±0.2
X.0	±0.3

Wellco T&C Co., Ltd.

DRAWING

CHECKED

APPROVAL

曾龍