

1 2 3 4 5 6 7 8 9 10 11 12






A B C D E F G H I J

NOTES:

1. MATERIAL:
INSULATOR: HIGH TEMPERATURE THERMOPLASTIC
FLAMMABILITY RATING: UL94V-0
CONTACT: COPPER ALLOY
GROUND MOUNT TEAR: COPPER ALLOY
2. PLATING:
CONTACT AREA: GOLD
UNDER PLATING: NICKEL OVERALL
SOLDER TAIL AREA: TIN/LEAD
GROUND MOUNT TEAR AREA: TIN/LEAD
3. SOLDER TAIL TO BE WITHIN 0.05 UPWARD AND 0.2 DOWNWARD FROM Z-DATUM PLACE, AND COPLANARITY OF SOLDER TAILS TO BE WITHIN 0.12
4. PART NO: CFH050-XX-0005

COLOR 0: BLACK
7: IVORY

PLATING:
D-GOLD FLASH
2-10U"GOLD
UNLEAD PLATING:
A-GOLD FLASH
C-10U"GOLD

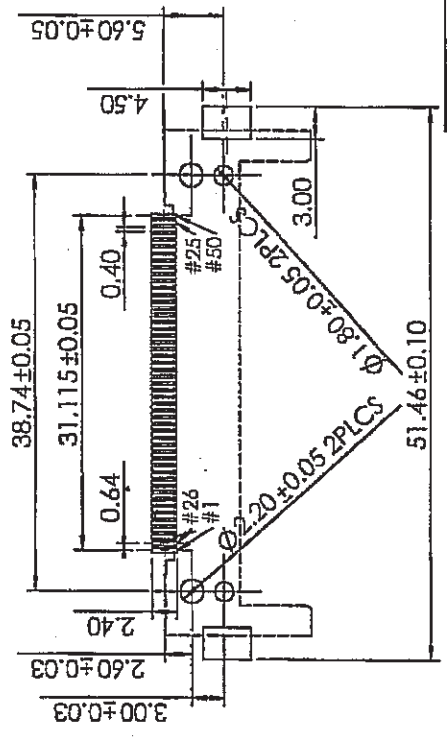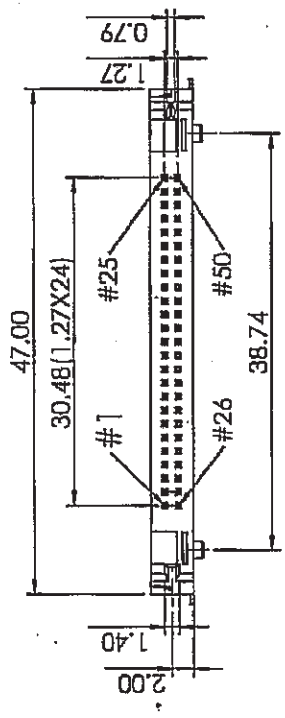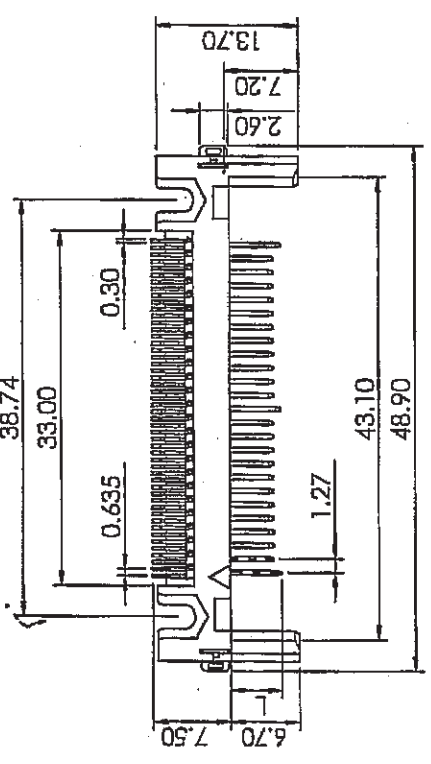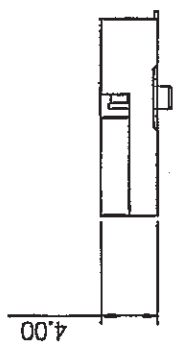

PIN NUMBER	DIM L±0.10
25, 26	3.50
ALL OTHER PINS	4.25
1, 13, 38, 50	5.00

GENERAL TOLERANCE	
X±0.40	X"±5°
.X±0.30	.X"±2°
.XX±0.20	.XX"±1°
.XXX±0.10	.XXX"±0.5°

1. THIS PRODUCT DOES NOT CONTAIN
HARMFUL OR TOXIC MATERIALS
2. ALL RIGHTS RESERVED. PRODUCTS
ARE COVERED BY PATENTS AND/OR
PATENTS PENDING.



RECOMMENDED P.C.B PATTERN

Wellco T&C Co., Ltd.

TITLE
CF HEADER TYPE I CONNECOR
LOW PROFILE, LEAD IN L=6.70mm(NORMAL)

PART NO.
CFH050-XX-0005

DWG NO.
CFH050-18-E

DATE
1 / 1

REV.
E

APPROVAL
JUN 13 2005

CHECKED
JUN 13 2005

DRAWN
JUN 13 2005

UNIT
mm

11

10

11

10

11

10

11

10

11

10

11

10