
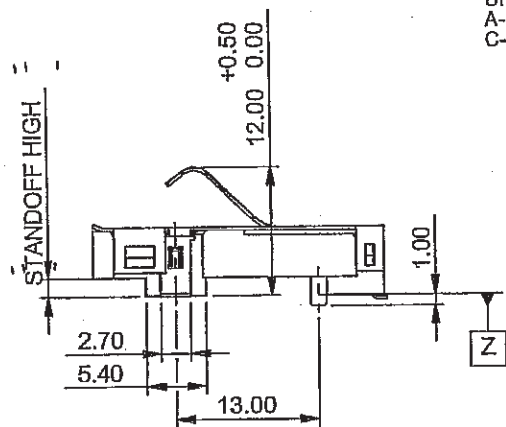
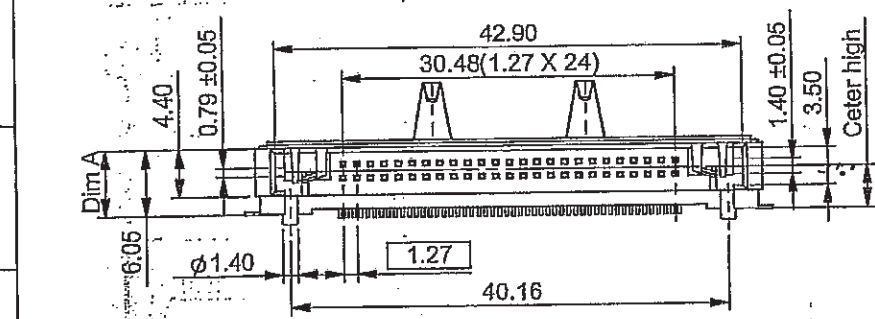
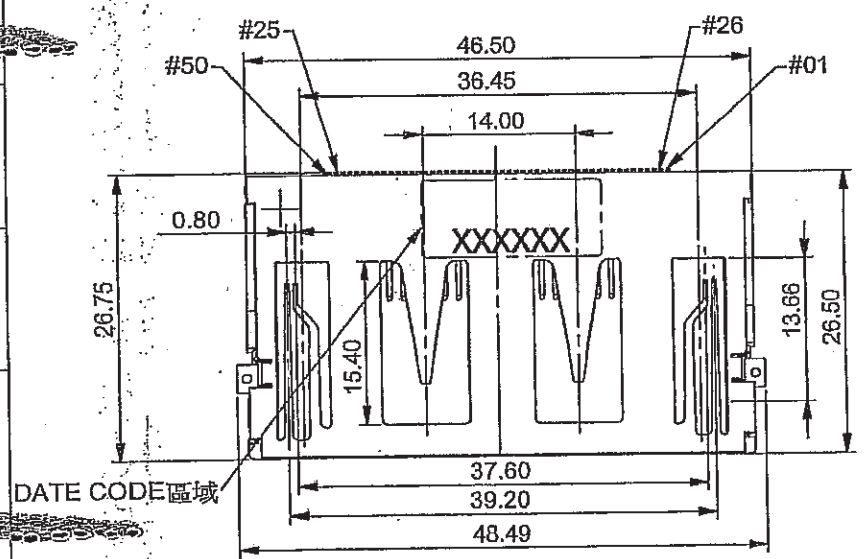


REV	MODIFICATION	DRAWN	APPROVED
B	EN	謝妃見	LEO
C	EN 064006	謝妃見	LEO

NOTES:

1. MATERIAL :
INSULATOR : HIGH TEMPERATURE THERMOPLASTIC
FLAMMABILITY RATING: UL94V-0
COLOR : IVORY
CONTACT : COPPER ALLOY
MOUNT EAR : COPPER ALLOY
2. PLATING :
CONTACT AREA: 10 μ GOLD
UNDER PLATING: NICKEL OVERALL
SOLDER TAIL AREA: TIN/LEAD
MOUNT EAR AREA: TIN/LEAD
3. SOLDER TAILS TO BE WITHIN 0.05 UPWARD AND 0.2 DOWNWARD FROM Z-DATUM PLACE, AND COPLANARITY OF SOLDER TAILS TO BE WITHIN 0.12
4. PART NO: CFH050-XX-1L80

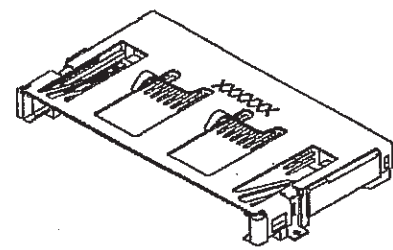



PLATING:
0-G/F
2-10u" GOLD
UNLEAD PLATING:
A-G/F
C-10u" GOLD lead free

STANDOFF=1.65 mm 無CLAMP


COLOR: 0-BLACK
7-象牙白



TYPE:
1- WITH LOGO 沒clamp, 加鐵殼

STANDOFF	Center high	Dim A
1.65 mm	3.85	6.05

GENERAL TOLERANCE		Wellco T&C Co., Ltd.		
X± 0.40	X°± 5°			
X± 0.30	X°± 2°			
XX± 0.20	XX°± 1°			
XXX± 0.10	XXX°± 0.5°			
		TITLE	CFH AND COVER TYPE I REVERSE STANDOFF =1.65mm	
UNIT mm		PART NO.	CFH050-XX-1L80	
		DWG NO.	CFH050-112-C	
APPROVED 	CHECKED 	DRAWN 	SCALE NONE	SHEET 1 / 2
		PROL 	REV. C	

A
B
C
D
E
F
G
H
I
J

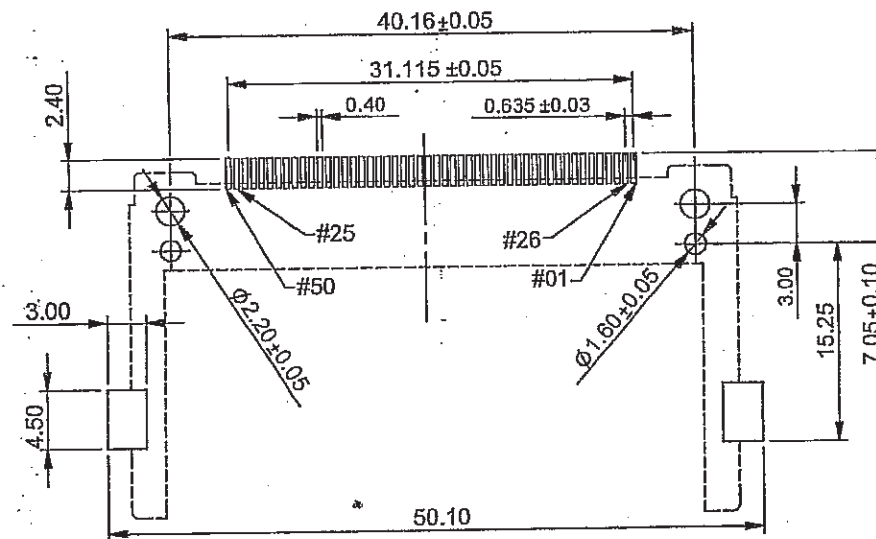

GENERAL TOLERANCE		Wellco T&C Co., Ltd.
X $\pm$ 0.40	X $^{+}$ 5"	
X $\pm$ 0.30	X $^{+}$ 2"	
XX $\pm$ 0.20	XX $^{+}$ 1"	
XXX $\pm$ 0.10	XXX $^{+}$ 0.5"	
TITLE		CFH AND COVER TYPE I REVERSE STANDOFF = 1.65mm
UNIT	PART NO.	DWG NO.
mm	CFH050-XX-1L80	CFH050-112-C
APPROVED	CHECKED	DRAWN
		
SCALE	SHEET	
NONE	2 / 2	
PROJ.	REV.	
	C	