

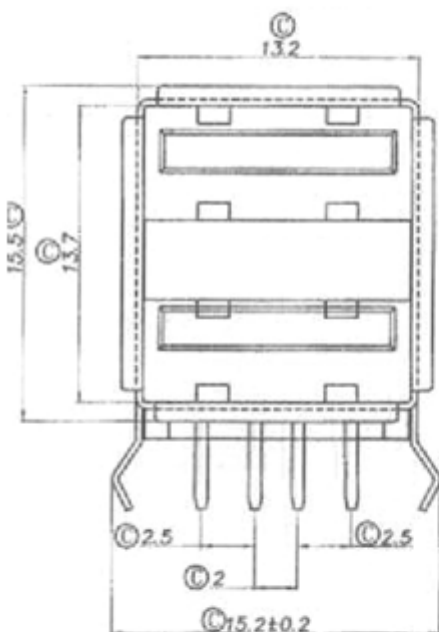


REV.	Revision note	Date	Signature	Checked
A				


亦

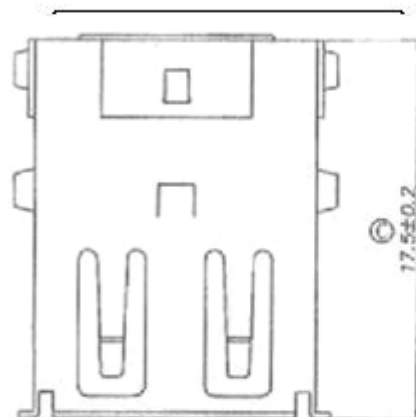

NOTE:
1. MATERIAL:SEE NOTE

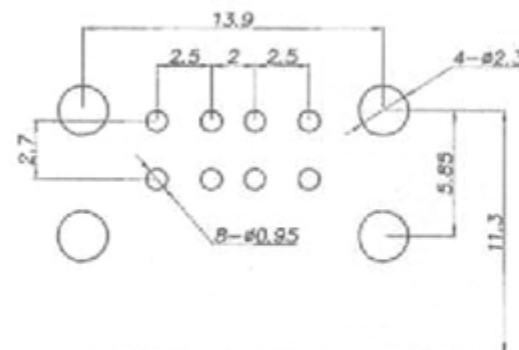

P. C. B LAYOUT
TOP VIEW

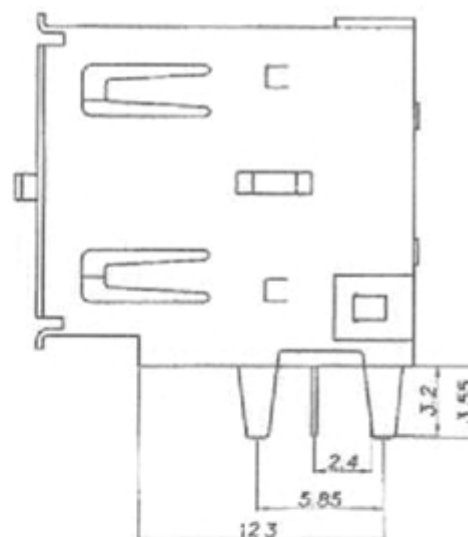

特性 Specifications;

电学 Electrical:

接触电阻 Contact Resistance

30 millionms MAX

耐电压 Dielectric Withstanding Voltage:

500v AC AT Sea Level

绝缘电阻 Insulation Resistance:

1000 MEGA ohms MLN

机械 Mechanical:

接合力 Mating Force;

4.0 KG MAX 最大4 Kg

拔出力 Unmating Force;

0.7 KG MIN. 最小0.7 KG

材料 Material:

塑胶 Housing:High Temperatuye Thermoplastics

UL 94V-0 耐高温塑胶

端子 Contact:Copper Alloy 铜合金

铁壳 Shell:Copper Alloy 铜合金

电镀 Finish:

端子 Contact:Plated Gold in Mating Area;

Tin/On Solder Tails

铁壳成镀金/ 镀镍等

铁壳 Shell:

nickel Plating

镀镍

Wellco T&C Co., Ltd.

DESIGN FOR

NAME		PRODUCT CODE	UNIT CODE	公 司				
PART NO	2950-铁壳/铁壳	EDITION	A	尺 寸	公 差	角 度	公 差	
PART	ZL007-19	PAPER	29/33	E	+0.2	E	+0.2	
DRAWING	09.03.02	ANSI	UNIT	mm	E.E	+0.1	E.E	+0.1
CHECKED		SCALE		E.EE	+0.01	E.EE	+0.01	
APPROVED		FILES		E.EEE	+0.002	E.EEE	+0.002	