

REV.	ECN.NO.	DATE
A	RELEASED	01/19-'08

NOTES:

*Material

Body: LCP, UL 94V-0 Rated; Color: Black.
Shield: Brass.
Plating: Nickle Plating .
Contact: Phosphor Bronze .
Plating: Tin Plating On Solder Tail.
Gold Plating Over Nickel on Contact Area;

*Electrical Specification

Operation Voltage: 40 VAC max.
Current Rating: 0.5 Ampere per contact
Contact Resistance: 30 Milliohms max.
Insulation Resistance: 100 Megohms min.
Dielectric Withstanding Voltage: 500 VDC


*Environmental

Operating Temperature: -20°C to +85°C

*How To Order

WDPC-20 F L 1 P U 3
Series NO. _____ 3:Tray
Number of Contacts _____ Blank:No Mark
Gold A:Flash _____ U:Lead Free
D:15u" F:30u" _____ P:Phosphor Bronze
L: LCP _____ 1:Black

REV													
Units	mm	Scale	3:2	Drawing By		Data		Wellco T&C Co., Ltd.					
Tolerance Unless Otherwise Specified				Reviewed By		Data						Date	01/19-'08
.X ~ ±0.38				Approval By		Data		Sheet	1 of 1				
.XX ~ ±0.25								Third Angle Projection					
.XXX ~ ±0.20													
Angle ~ ± 3°										Drawing No.		REV	A

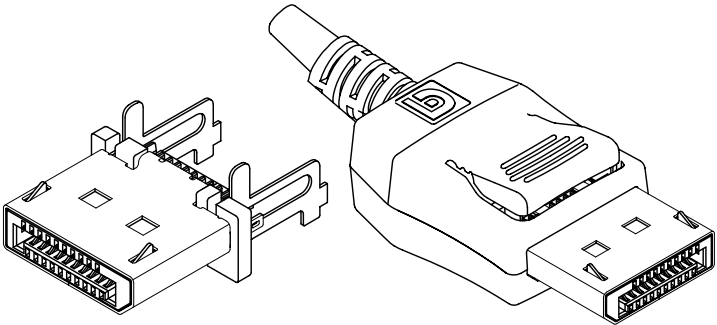

Product 3D Dwg

