



機密文件

REV.	MODIFICATION	DRAWN	APPROVED
B	EN052806	呂峰峰	VOSS
C	EN 073106	Evema	Bob

- NOTES :
- 材質:
本體:LCP
端子:銅合金
鐵殼:銅合金
 - 鐵殼須扣定位,不可有壓崩卡勾之情況
 - 定位柱不可有斷裂
 - 外觀鐵殼處不可有髒污,手紋,刮傷
 - 印刷DATE CODE是否正確
 - 端子共面度必須在0.08mm以內
 - 料號: MMPN10- X 0-1 X X 0
T T T
a b c
- a - CONTACT UNLEAD PLATING:
A: GOLD FLASH
C: 10μ" GOLD
- b - DATE CODE:
0: WITH DATE CODE & LOGO
1: W/O DATE CODE & LOGO
2: WITH DATE CODE W/O LOGO
3: W/O DATE CODE WITH LOGO
- △ C - 0:USE PMMPNT-59-3100 LOCK PIN
1:USE PMMPNT-59-3110 LOCK PIN

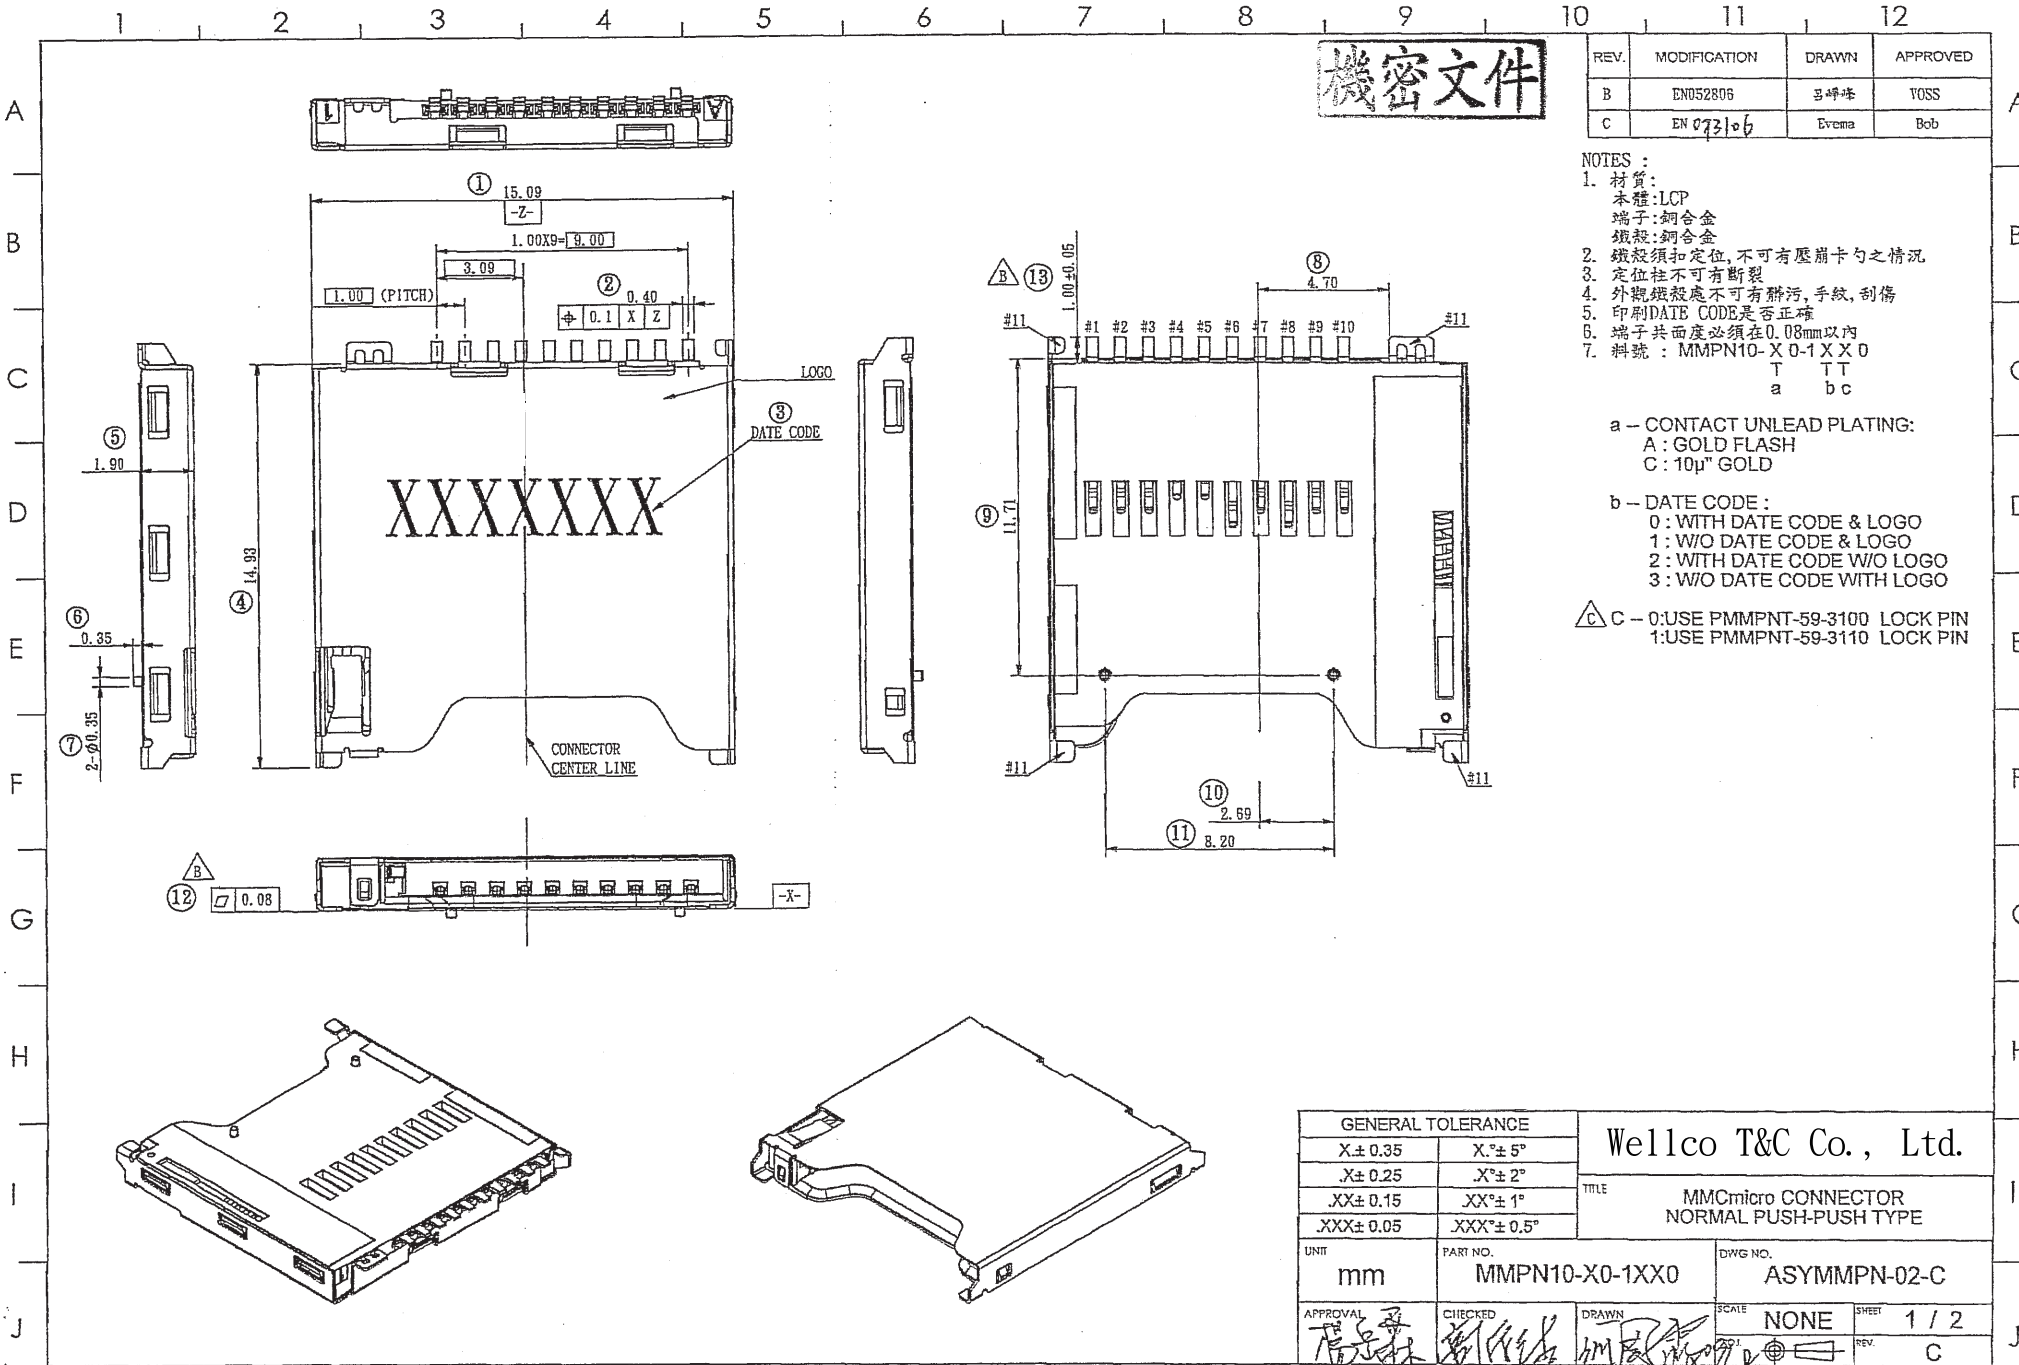

GENERAL TOLERANCE		Wellco T&C Co., Ltd.	
X±0.35	X°±5°		
.X±0.25	.X°±2°		
.XX±0.15	.XX°±1°		
.XXX±0.05	.XXX°±0.5°		
UNIT		TITLE	
mm	PART NO. MMPN10-X0-1XX0	MMCmicro CONNECTOR NORMAL PUSH-PUSH TYPE	
APPROVAL	CHECKED	DRAWN	SCALE
NONE	1 / 2	C	QIP-04-04-B

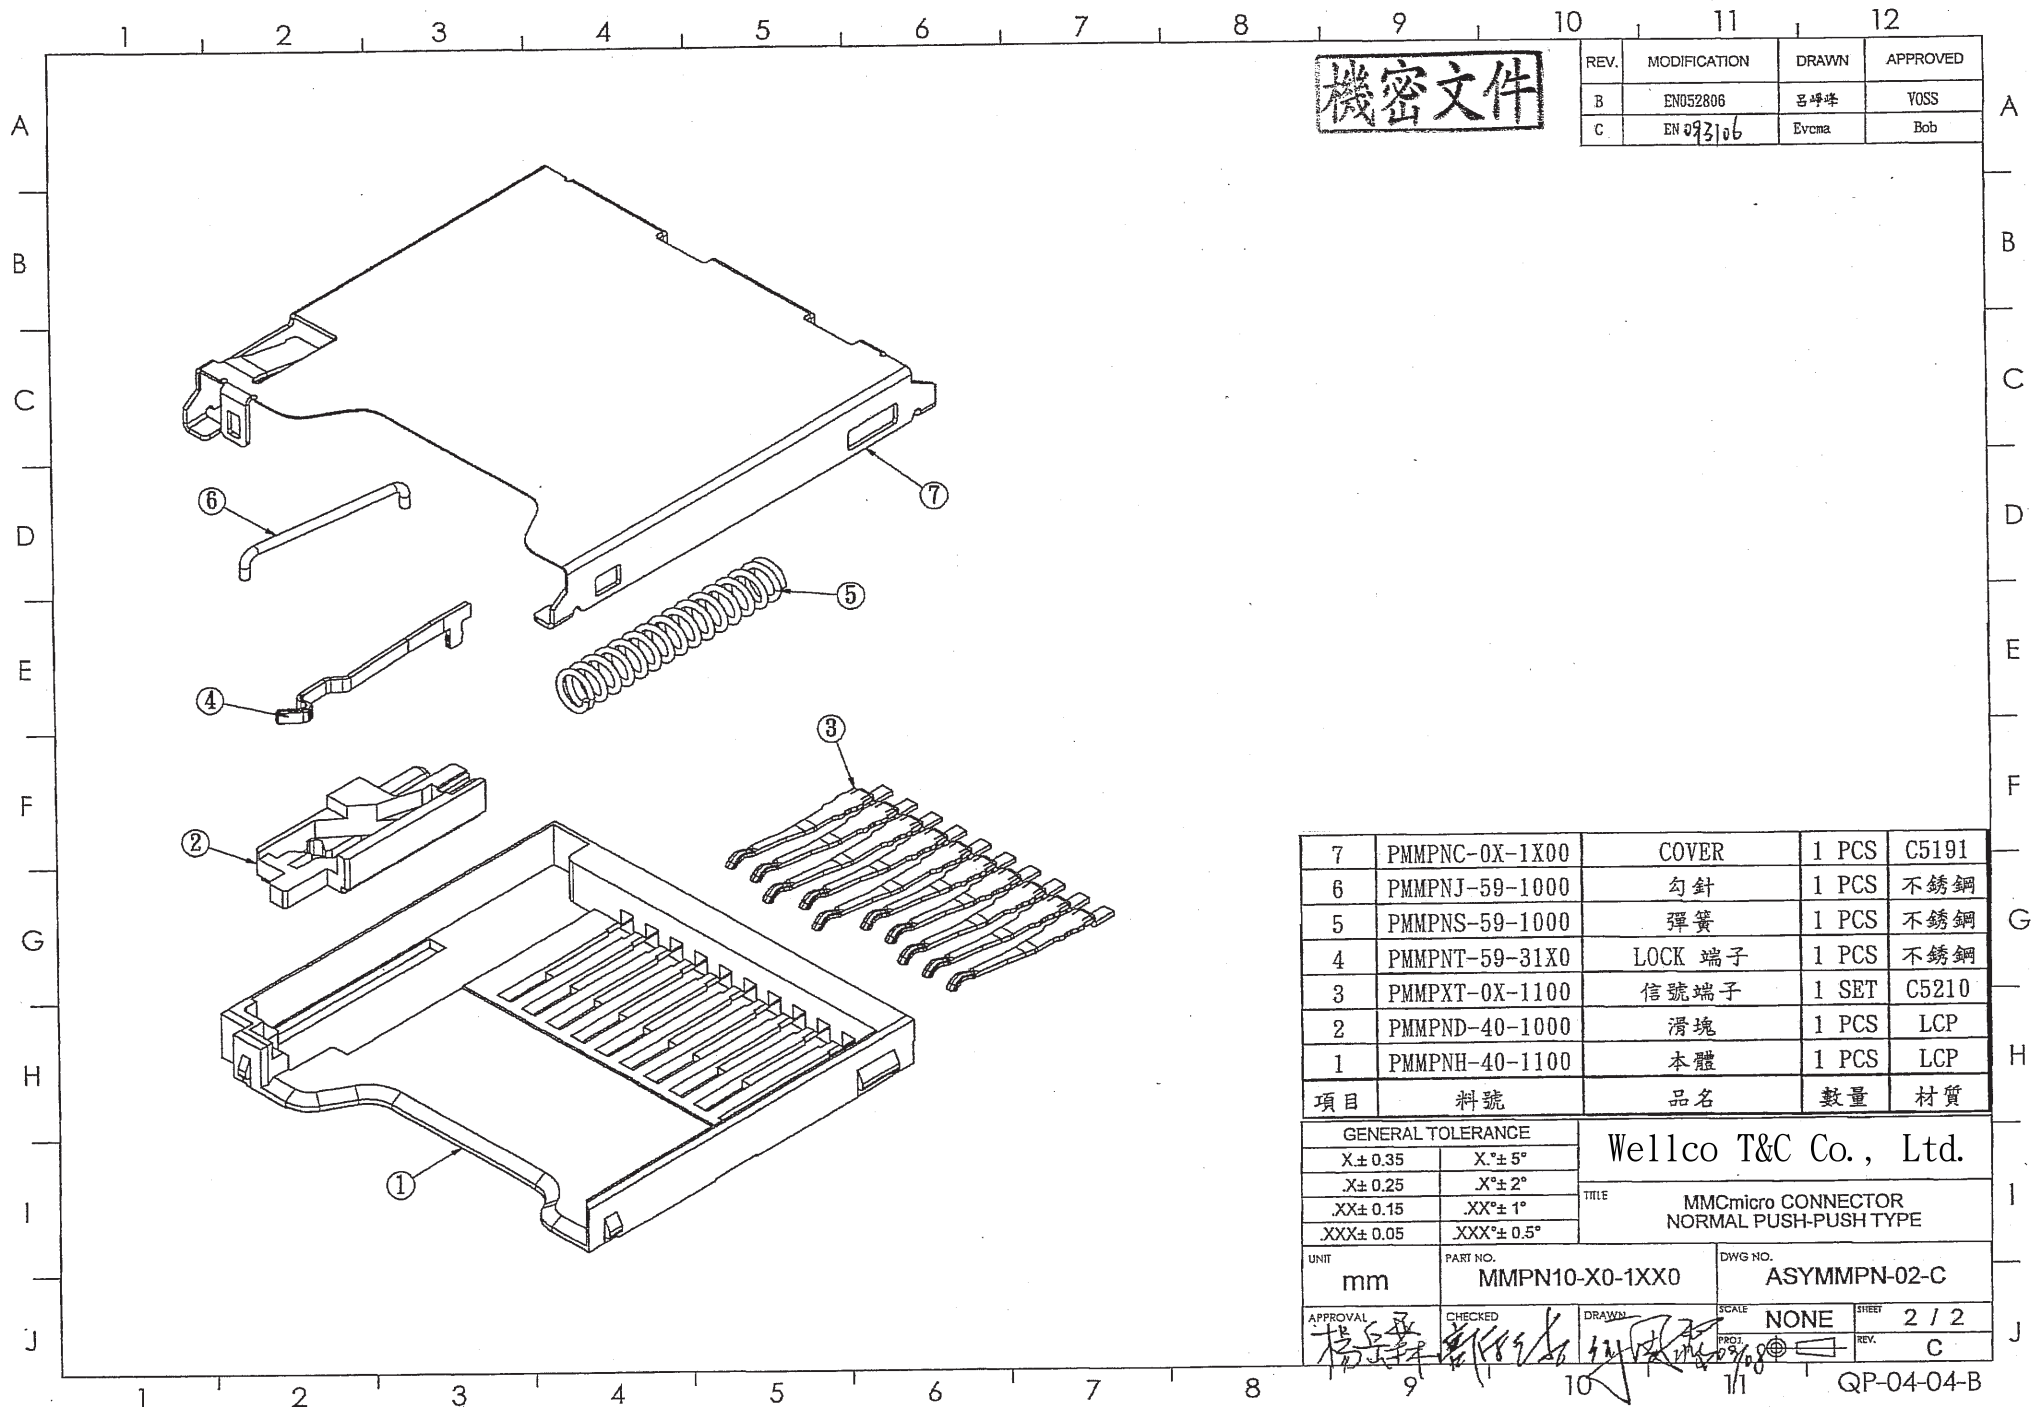

機密文件

REV.	MODIFICATION	DRAWN	APPROVED
B	EN093106	Evema	Bob

NOTES:

1. MATERIAL:
INSULATOR: HIGH TEMPERATURE THERMOPLASTIC
FLAMMABILITY RATING: UL94V-0 COLOR: BLACK
CONTACT: COPPER ALLOYS
COVER: COPPER ALLOYS

2. CONTACT AREA PLATING: GOLD OVER Ni

3. P/N: MMPN10-X0-1XX0
T T
a b c

a - CONTACT UNLEAD PLATING:
A: GOLD FLASH
C: 10μ" GOLD

b - DATE CODE:
0: WITH DATE CODE & LOGO
1: W/O DATE CODE & LOGO
2: WITH DATE CODE W/O LOGO
3: W/O DATE CODE WITH LOGO

C - 0: USE PMMPNT-59-3100 LOCK PIN
1: USE PMMPNT-59-3110 LOCK PIN

PIN NO.	NAME
#01	DAT2
#02	DAT3
#03	CMD
#04	VSS1
#05	VDD1
#06	VDD2
#07	CLK
#08	VSS2
#09	DAT0
#10	DAT1
#11	GND

GENERAL TOLERANCE	
X±0.40	X°±5°
X±0.30	X°±2°
.XX±0.20	.XX°±1°
.XXX±0.10	.XXX°±0.5°

Wellco T&C Co., Ltd.

TITLE
MMCmicro CONNECTOR
NORMAL PUSH-PUSH TYPE

CUSTOMER DRAWING

PART NO.
MMPN10-X0-1XX0

DWG NO.
MMPN10-02-B

APPROVAL
CHECKED
DRAWN
UNIT
mm

SCALE
2:1
SHEET
1 / 2
REV.
B




1. THIS PRODUCT DOESN'T CONTAIN ENVIRONMENTAL HAZARDOUS MATERIALS PER DIRECTIVE 2002/95/EC FOR ROHS.
2. ALL RIGHTS RESERVED. PRODUCTS ARE COVERED BY PATENTS AND/OR PATENTS PENDING.


QP-04-33-B

機密文件


REV.	MODIFICATION	DRAWN	APPROVED
B	EN093106	Evema	Bob

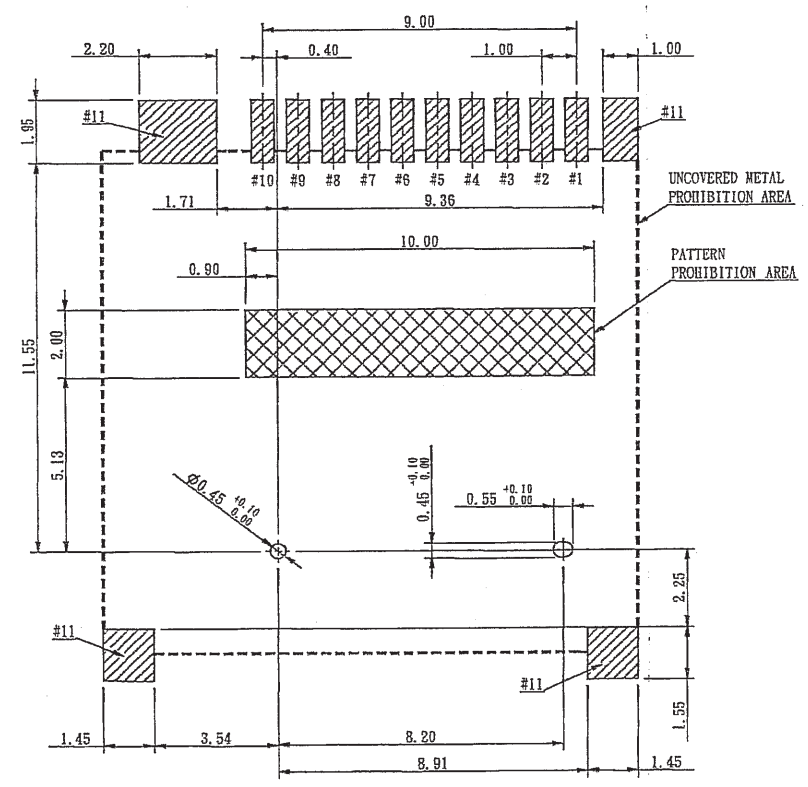

RECOMMEND P.C.B. LAYOUT
TOLERANCE ± 0.05

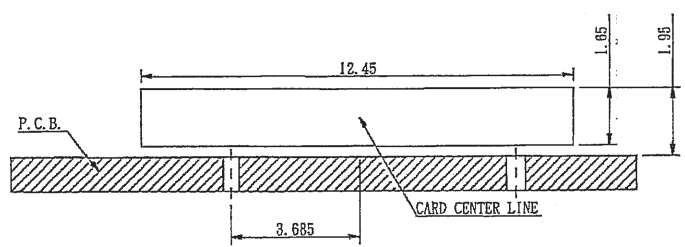

RECOMMEND CARD SLOT
TOLERANCE ± 0.05



1. THIS PRODUCT DOESN'T CONTAIN ENVIRONMENTAL HAZARDOUS MATERIALS PER DIRECTIVE 2002/95/EC FOR ROHS.
2. ALL RIGHTS RESERVED. PRODUCTS ARE COVERED BY PATENTS AND/OR PATENTS PENDING.

GENERAL TOLERANCE		Wellco T&C Co., Ltd.	
X ± 0.40	X° $\pm 5^\circ$		
.X ± 0.30	.X° $\pm 2^\circ$		
.XX ± 0.20	.XX° $\pm 1^\circ$		
XXX ± 0.10	XXX° $\pm 0.5^\circ$	TITLE	
CUSTOMER DRAWING		MMCmicro CONNECTOR NORMAL PUSH-PUSH TYPE	
		PART NO.	DWG NO.
		MMPN10-X0-1XX0	MMPN10-02-B
APPROVAL	CHECKED	DRAWN	UNIT
mm	mm	mm	mm
SCALE		SHEET	
2:1		2 / 2	
PROJ.		REV.	
B		B	

QP-04-33-B