

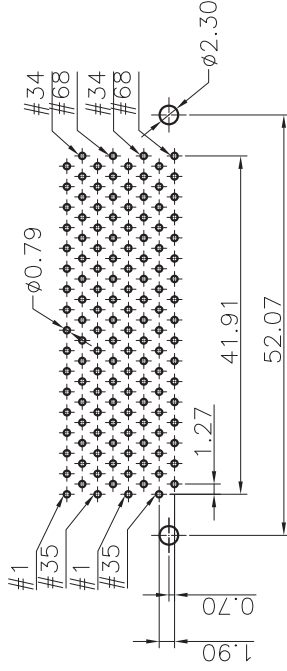
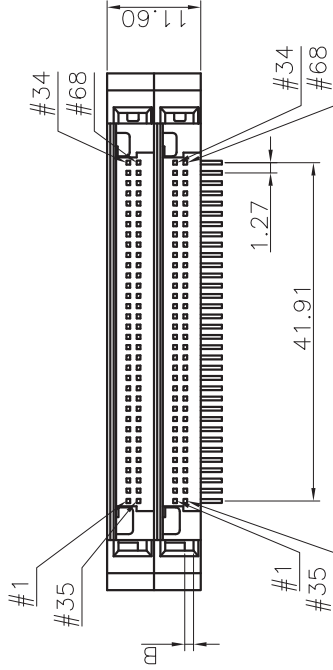


REV	Date	Instruction
1.3	2009/07/21	Modify Draw

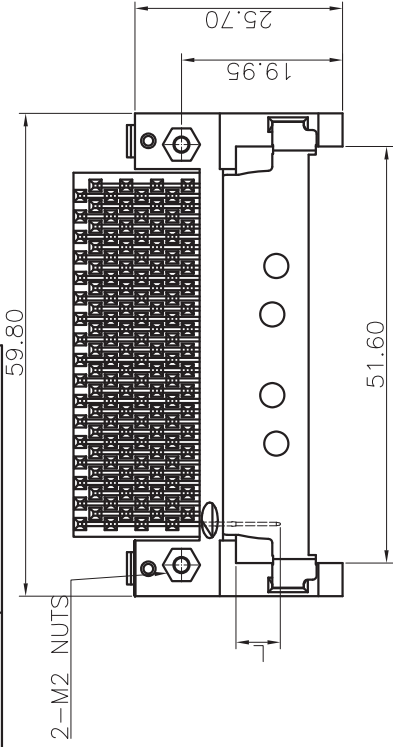

PIN TYPE	DIM	L±0.10	PIN NO.
DETECT	3.50mm		36,67
GENERAL	4.25mm		ALL OTHER PINS
POWER	5.00mm		1,17,34,35,51,68

DIM	B
5.0V	= 1.1mm
3.3V	= 2.2mm



[43010000] SERIES

PCMCIA, Without Guide, Double Deck,
Without Ejector Bar, Short Base,

Screw Type

Physical:

Housing: LCP, UL 94V-0

Contact: Copper Alloy

Specifications:

Voltage Current Rating: 0.5A, 200V AC

Insulation Resistance: 1000M ohm min

Contact Resistance: 20m ohm max

Dielectric Withstanding Voltage:

AC 500V For 1 Minute

Temperature Rating: -20°C To +60°C

Wave Soldering temperature:

▲ **Lead Part:** 245±5°C, 5sec

RoHS Part: 260±5°C, 5sec

ORDERING CODE

43010000 00 00 01 -LF

1 2 3 4 5

1. SERIES NO.

2. STAND OFF

00=NO STAND OFF

3. VLTAGE

00=3.3V 01=5.5V

4. PLATED

01=SELECTIVE GOLD FLASH

06=SELECTIVE GOLD PLATED 15u"

5. PRODUCT'S STATUS

NON-SHOWED=STANDARD TYPE

LF=RoHS COMPLIANT

TOP VIEW

PCB LAYOUT RECOMMENDED

REV.	DATE	APPD.	CHR.	DR.	TOLERANCE	UNLESS OTHERWISE SPECIFIED
1.0	2003/04/28	DENNIS	DAVID	MAY	LINEAR	0.0±0.25
1.2	2005/05/09	DENNIS	DAVID	DDP		0.00±0.15
1.3	2009/07/21	BING	YI	YI	ANGLES	±3

**Wellco T&C Co., Ltd.**

ENGINEER DWG	TITLE	PCMCIA CARD
	DWG NO.	43010000XXXXXX
	SCALE	1:1 SHEET 1 OF 1