

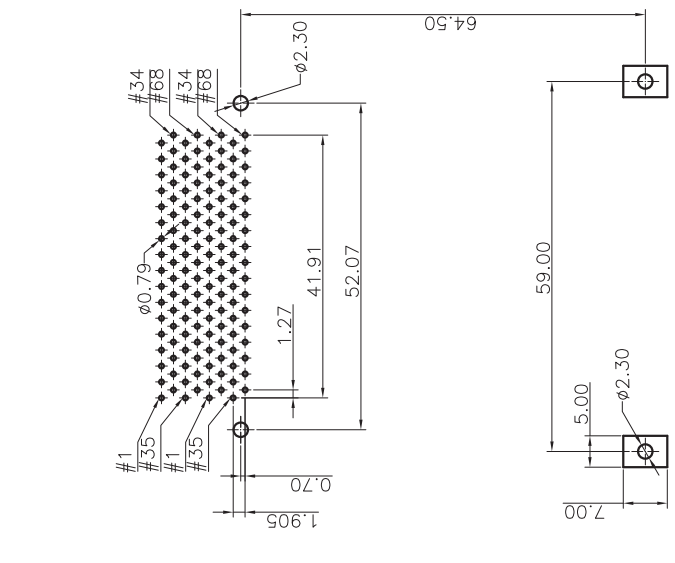
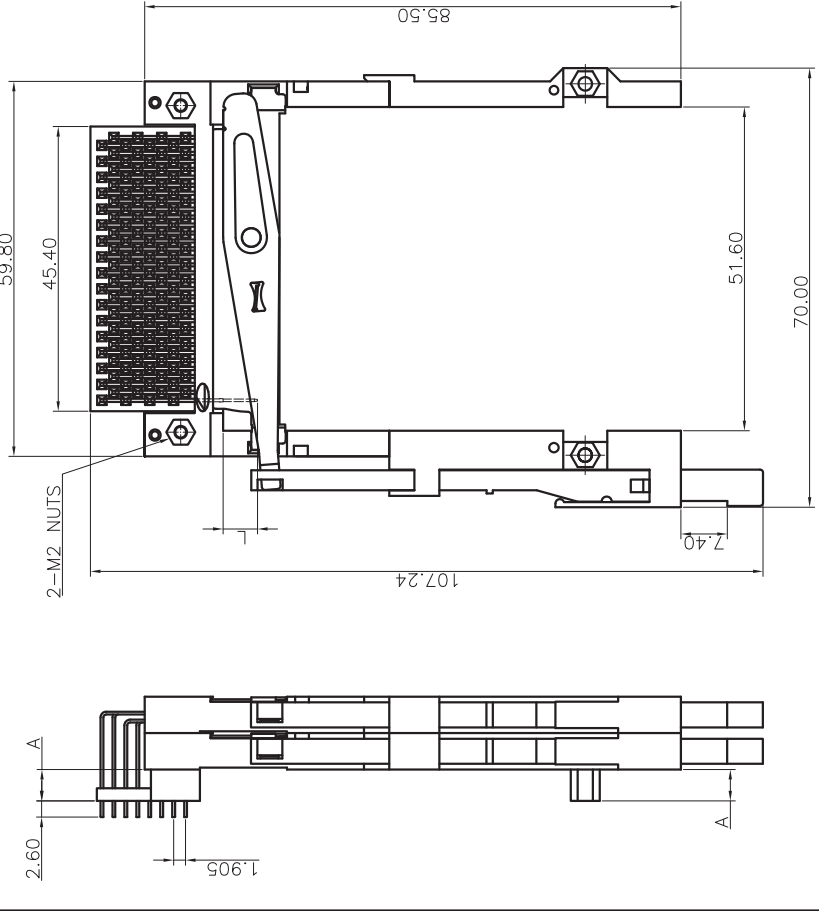


REV	Date	Instruction
1.3	2009/07/21	Modify Draw ▲



TOP VIEW
PCB LAYOUT RECOMMENDED

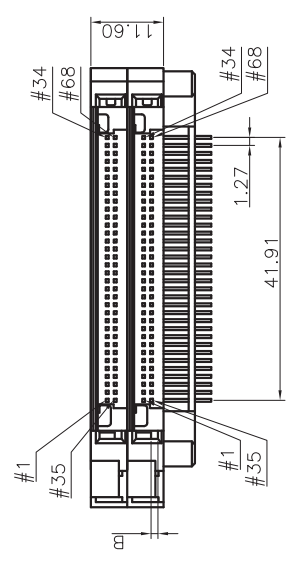

PIN	TYPE	DIM. L±0.10	PIN NO.
DETECT		3.50mm	36,67
GENERAL		4.25mm	ALL OTHER PINS
POWER		5.00mm	1,17,34,35,51,68

DIM B	
5.0V	±1.1mm
3.3V	±2.2mm
DIM A	
4.0mm	12.3mm
5.0mm	13.3mm
5.5mm	13.3mm

[43010400] SERIES

PCMCIA,With Guide,Double Deck,
Left Ejector Bar,Screw Type
Physical:

Housing: LCP, UL 94V-0
Contact: Copper Alloy

Specifications:

Voltage Current Rating: 0.5A. 200V AC
Insulation Resistance: 1000M ohm min
Contact Resistance: 20m ohm max
Dielectric Withstanding Voltage:
AC 500V For 1 Minute

Temperature Rating: -20°C To +60°C
Wave Soldering temperature:
▲ Lead Part: 245±5°C,5sec
RoHS Part: 260±5°C,5sec

ORDERING CODE

43010400 03 00 01 -LF
1 2 3 4 5

1.SERIES NO.
2.STAND OFF

03=4.0mm 04=5.0mm
05=5.5mm

3.VLTAGE

00=3.3V 01=5.5V


4.PLATED

01=SELECTIVE GOLD FLASH
06=SELECTIVE GOLD PLATED 15u"

5.PRODUCT'S STATUS

NON-SHOWED=STANDARD TYPE
LF=RoHS COMPLIANT

ENGINEER
DWG



UNIT:mm
SIZE: A4



Wellco T&C Co., Ltd.

TITLE	PCMCIA CARD
DWG NO.	43010400XXXXXX
SCALE	1:1
SHEET	1 OF 1

REV.	DATE	APPD.	CHR.	DR.	TOLERANCE UNLESS OTHERWISE SPECIFIED
1.0	2003/04/29	DENNIS	DAVID	MAY	LINEAR 0.0±0.25
1.2	2005/05/09	DENNIS	DAVID	DDP	0.00±0.15
1.3	2009/07/21	BING	YI	YI	ANGLES ±3