
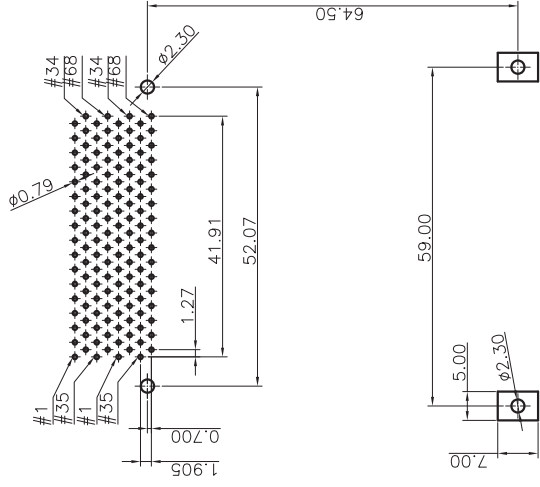




REV	Date	Instruction
1.3	2009/07/21	Modify Draw ▲

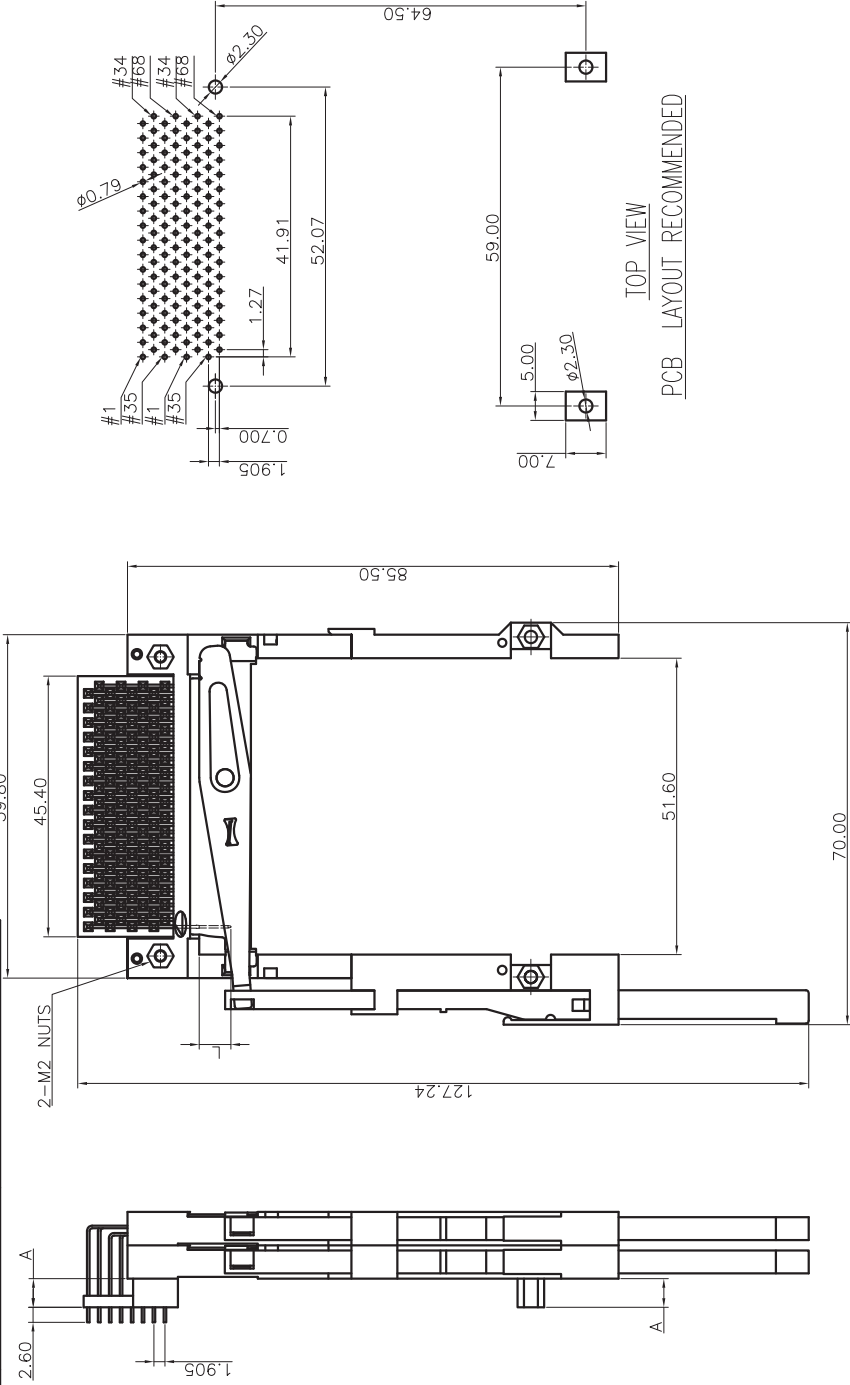

TOP VIEW

PCB LAYOUT RECOMMENDED

PIN TYPE	DM	L±0.10	PIN NO.
DETECT	3.50mm		36,67
GENERAL	4.25mm		ALL OTHER PINS
POWER	5.00mm		1,17,34,35,51,68

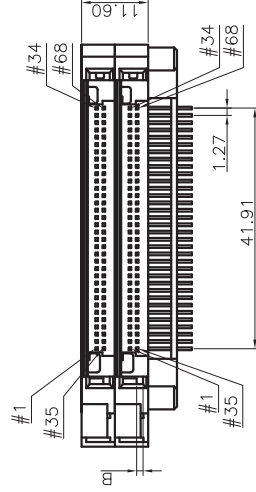

DIM. B	
5.0V±1.1mm	
3.3V±2.2mm	
DIM. A	DIM. C
4.0mm	12.3mm
5.0mm	13.3mm
5.5mm	13.3mm

[43010600] SERIES

PCMCIA,With Guide,Double Deck,
Long Left Ejector Bar,
Screw Type

Physical:

Housing: LCP, UL 94V-0

Contact: Copper Alloy

Specifications:

Voltage Current Rating: 0.5A, 200V AC

Insulation Resistance: 1000M ohm min

Contact Resistance: 20m ohm max

Dielectric Withstanding Voltage:

AC 500V For 1 Minute

Temperature Rating: -20°C To +60°C

Wave Soldering temperature:

Lead Part: 245±5°C,5sec

RoHS Part: 260±5°C,5sec

ORDERING CODE

43010600 03 00 01 -LF

- 1.SERIES NO.
2.STAND OFF

03=4.0mm 04=5.0mm

05=5.5mm

3.VLTAGE

00=3.3V 01=5.5V

4.PLATED

01=SELECTIVE GOLD FLASH


06=SELECTIVE GOLD PLATED 15u"

5.PRODUCT'S STATUS

NON-SHOWED=STANDARD TYPE

LF=RoHS COMPLIANT

ENGINEER
DWG



TOLERANCE UNLESS OTHERWISE SPECIFIED

0.0±0.25

LINEAR

0.00±0.15

ANGLES

±3



Wellco T&C Co., Ltd.

TITLE

PCMCIA CARD

UNIT:mm

DWG NO. 43010600XXXXXX

SIZE: A4

SCALE 1:1 SHEET 1 OF 1