

[43010902] SERIES

PCMCIA,With Guide,Double Deck,
Metal Right Ejector Bar,
Board Lock Type

Physical:

Housing: PBT, UL 94V-0

Contact: Copper Alloy

Specifications:

Voltage Current Rating: 0.5A. 200V AC

Insulation Resistance: 1000M ohm min

Contact Resistance: 20m ohm max

Dielectric Withstanding Voltage:

AC 500V For 1 Minute

Temperature Rating: -20°C To +60°C

Wave Soldering temperature:

Lead Part: 245±5°C,5sec

RoHS Part: 260±5°C,5sec

ORDERING CODE

43010902 04 00 01 -LF

1 2 3 4 5

1.SERIES NO.

2.STAND OFF

03=4.0mm 04=5.0mm

05=5.5mm

3.VLTAGE

00=3.3V 01=5.5V

4.PLATED


01=SELECTIVE GOLD FLASH

06=SELECTIVE GOLD PLATED 15u"

5.PRODUCT'S STATUS

NON-SHOWED=STANDARD TYPE

LF=RoHS COMPLIANT

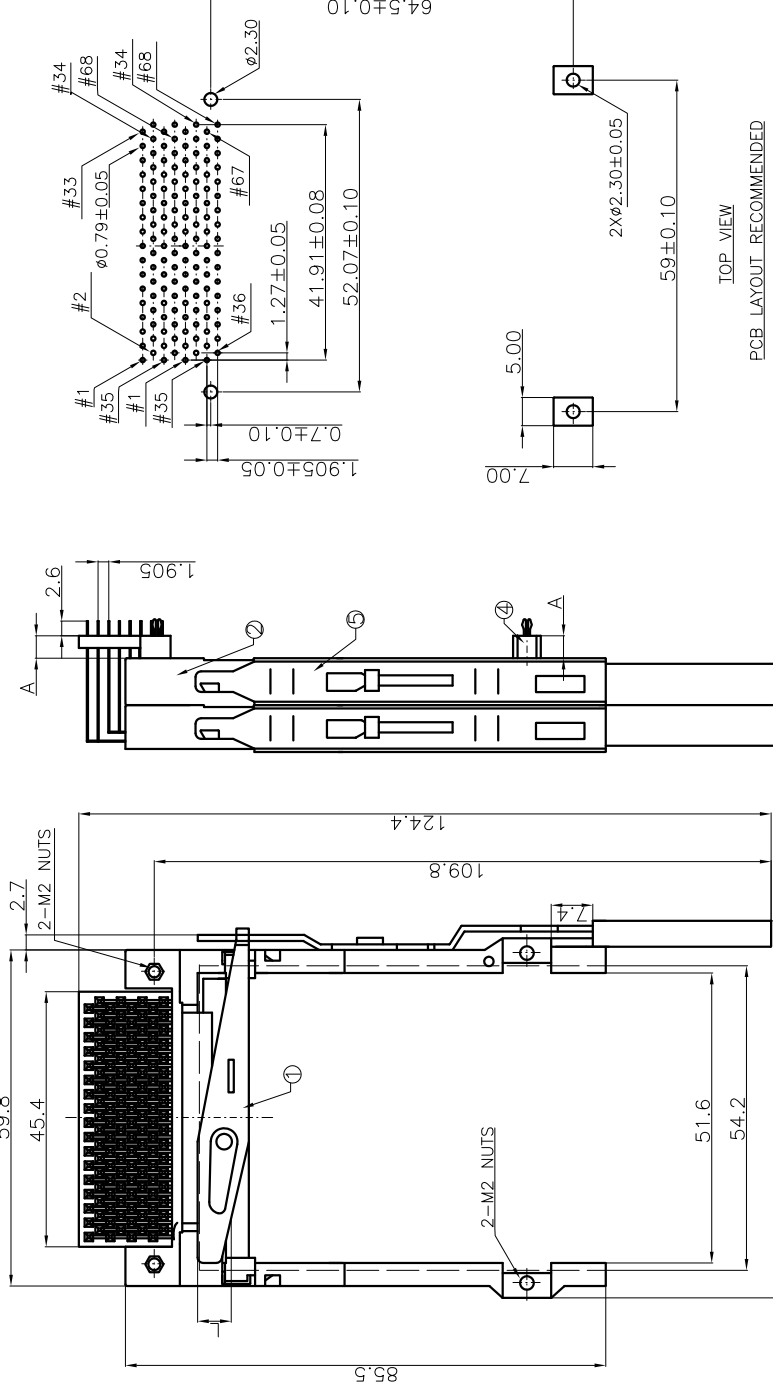



TOP VIEW

PCB LAYOUT RECOMMENDED

PIN TYPE	DIM L±0.10	PIN NO.
DETECT	3.50mm	36,67
GENERAL	4.25mm	ALL OTHER PINS
POWER	5.00mm	1,17,34,35,51,68

DIM A	DIM B
4.0mm	5.0V=1.1mm
5.0mm	3.3V=2.2mm
5.5mm	

NO	PART NAME	MATERIAL	STATUS
⑤	EJECTOR BAR	SPCC	Ni-Plating
④	BOARD LOCK	COPPER ALLOY	Ni-Plating
③	TERMINAL	COPPER ALLOY	Sn/Au-Plating
②	HOUSING	PBT	BLACK
①	SHIELD	SPCC	Ni-Plating

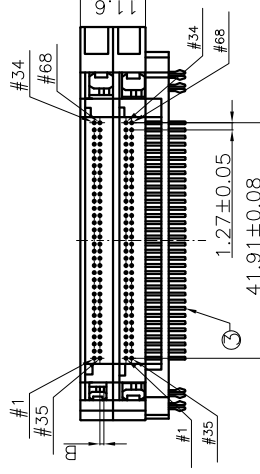

Wellco T&C Co., Ltd.

REV.	DATE	APPD.	CHR.	DR.	TOLERANCE UNLESS OTHERWISE SPECIFIED
1.0	2008/10/09	BING	DANIEL	ROSE	LINEAR 0.0±0.30
					0.00±0.20
					ANGLES ±3

CUSTOMER COPY	TITLE	PCMCIA CARD
UNIT:mm	DWG NO.	43010902XXXXXX
SIZE: A4	SCALE	1:1 SHEET 1 OF 1