

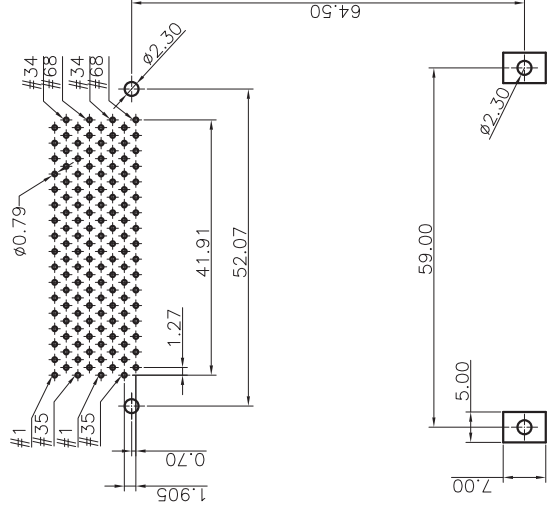
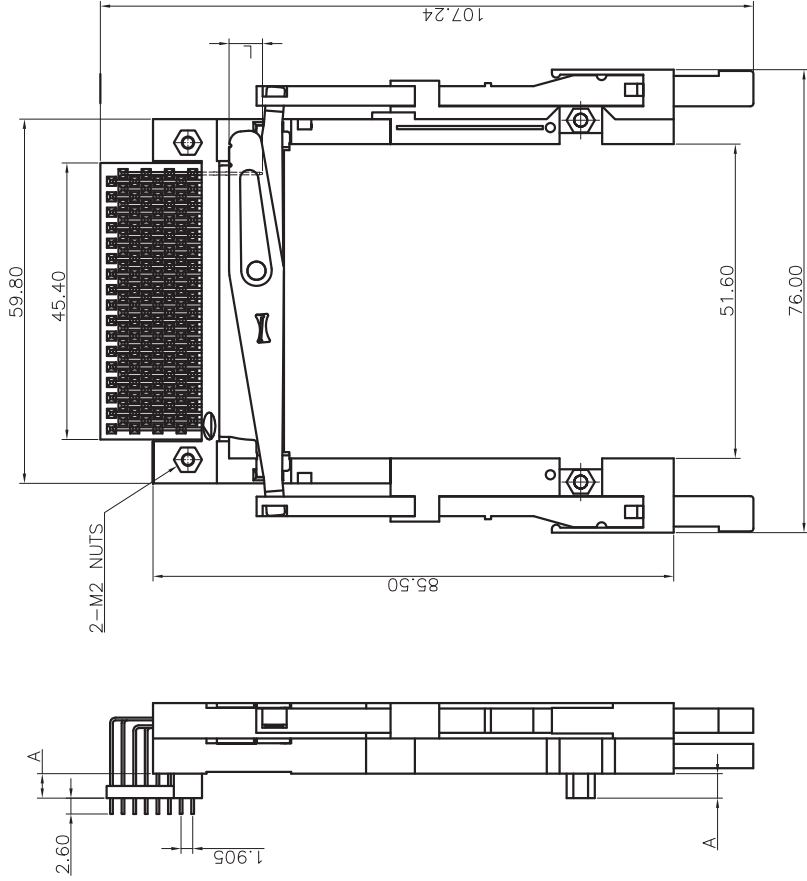


REV	Date	Instruction
1.3	2009/07/21	Modify Draw ▲



TOP VIEW

PCB LAYOUT RECOMMENDED

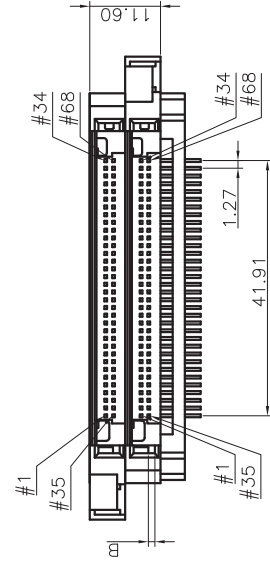

PIN TYPE	DIM. L±0.10	PIN NO.
DETECT	3.50mm	36,67
GENERAL	4.25mm	ALL OTHER PINS
POWER	5.00mm	1,17,34,35,51,68

DIM. B	
5.0V=	1.3mm
3.3V=	2.2mm
DIM. A	
4.0mm	12.3mm
5.0mm	13.3mm

[43011100] SERIES

PCMCIA, With Guide, Double Deck,
Upper-Left/Lower-Right
Ejector Bar, Screw Type

Physical:

Housing: LCP, UL 94V-0

Contact: Copper Alloy

Specifications:

Voltage Current Rating: 0.5A, 200V AC

Insulation Resistance: 1000M ohm min

Contact Resistance: 20m ohm max

Dielectric Withstanding Voltage:

AC 500V For 1 Minute

Temperature Rating: -20°C To +60°C

▲ Wave Soldering temperature:

Lead Part: 245±5°C, 5sec

RoHS Part: 260±5°C, 5sec

ORDERING CODE

43011100 03 00 01 -LF

1

1. SERIES NO.

2. STAND OFF

03=4.0mm 04=5.0mm

05=5.5mm

3. VLTAGE

00=3.3V 01=5.5V

4. PLATED

01=SELECTIVE GOLD FLASH

06=SELECTIVE GOLD PLATED 15u"

5. PRODUCT'S STATUS

NON-SHOWED=STANDARD TYPE

LF=RoHS COMPLIANT

ENGINEER
DWG



UNIT:mm

SIZE: A4



Wellco T&C Co., Ltd.

TITLE

PCMCIA CARD

DWG NO.

43011100XXXXXX

SCALE

1:1 SHEET 1 OF 1

TOLERANCE UNLESS OTHERWISE SPECIFIED

LINEAR 0.0±0.25

0.00±0.15

ANGLES ±3

DR.

CHR.

APPD.

DATE

REV.

MAY

DAVID

DENNIS

2003/04/29

1.0

DDP

DAVID

DENNIS

2005/05/09

1.2

YI

YI

BING

2009/07/21

1.3