
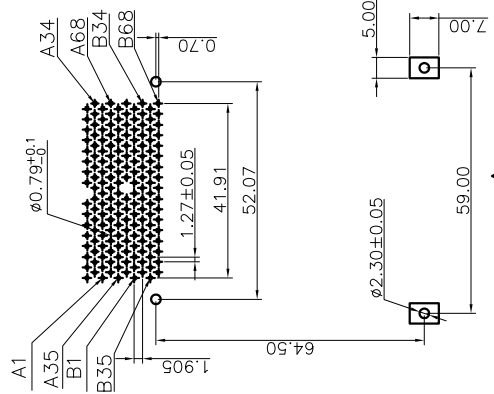
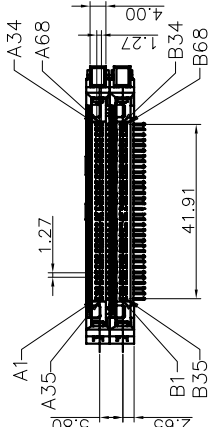


REV	Date	Instruction
1.1	2008/10/18	Modify View▲

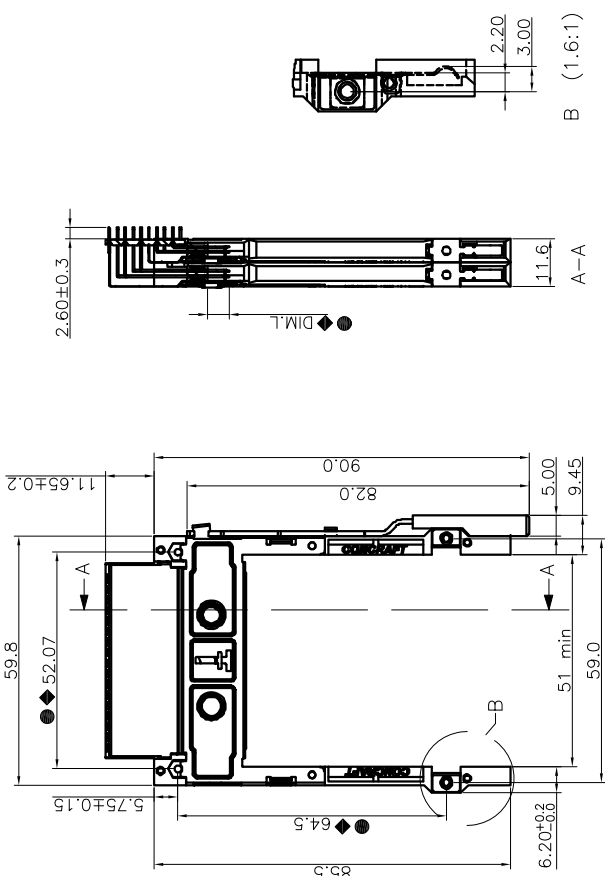

NOTE:
1. INSPECTION SYMBOL:
●: MANUFACTURER INSPECTION
◆: Q.C INSPECTION
2. PLEASE REFER TO TABLE 1 FOR TERMINAL LENGTH.

PIN TYPE	DIM. L±0.20	PIN NUMBER
DETECT	3.50 mm	A36,A67,B36,B67
GENERAL	4.25 mm	THE REST
POWER	5.00 mm	A1,A17,A34,A35,A51,A68 B1,B17,B34,B35,B51,B68

REV.	DATE	APPD.	CHR.	DR.	TOLERANCE UNLESS OTHERWISE SPECIFIED
1.0	2007/08/04	MICHAEL	DANIEL	KYLE	LINEAR 0.0±0.20
1.1	2008/10/18	BING	DANIEL	LILY	0.00±0.10
					ANGLES

[43011400] SERIES

Pcmcia,Double Deck ,Dip,
With Guide,With Ejector Bar
Cardbus, Screw Type.

Physical:

Housing: PBT, UL 94V-0
Contact: Copper Alloy

Specifications:


Voltage Current Rating: 0.5A. 200V AC
Insulation Resistance: 1000M ohm min
Contact Resistance: 20m ohm max
Dielectric Withstanding Voltage:
AC 500V For 1 Minute
Temperature Rating: -20°C To +60°C
Wave Soldering temperature:
Lead Part: 245±5°C,5sec
RoHS Part: 260±5°C,5sec

ORDERING CODE

43011400 00 00 01 -3 LF
1 2 3 4 5 6

- 1.SERIES NO.
- 2.STAND OFF
00=NON STASND OFF
- 3.VOLTAGE
00=3.3V
- 4.PLATED
01=SELECTIVE GOLD FLASH
- 5.ECN CODE
- 6.PRODUCT'S STATUS
NON-SHOWED=STANDARD TYPE
LF=RoHS COMPLIANT

CUSTOMER COPY



Wellco T&C Co., Ltd.

TITLE	PCMCIA CARD
DWG NO.	43011400XXXXX-3
SCALE	1:1
SHEET	1 OF 1

UNIT:mm
SIZE: A4