


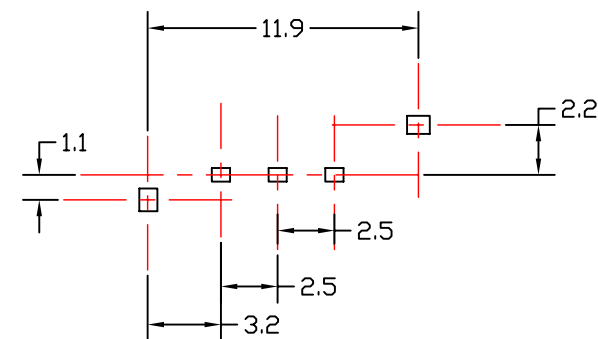
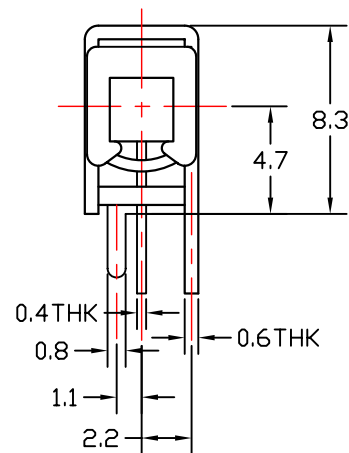


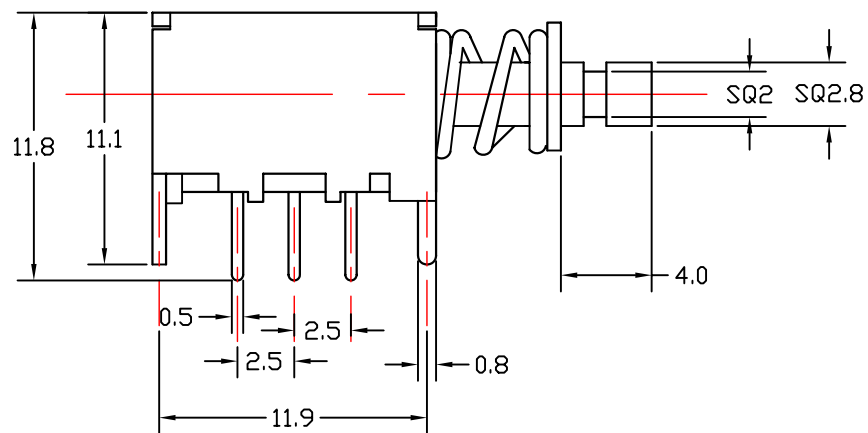

P. C. B TERMINAL POSITION



SCHEMATIC

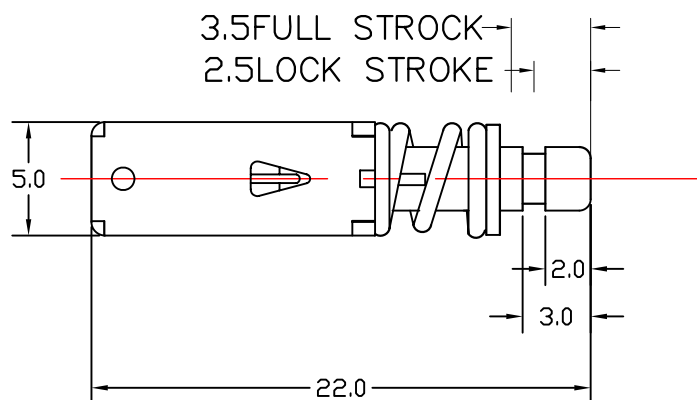

Specifications		12E05
Rating:	DC 50V 0.3A	TITLE: PUSH SWITCHES
Contact Resistance:	30m ohm max	UNLESS OTHERWISE PECIFIED TOLERANCE ± 0.1 ANGLE TOL $\pm 30^\circ$
Insulation Resistance:	100M ohm at 500V DC	
Dielectnc Strength:	AC 500V for 1 Minute	
Insertion & Extraction Force:	250 $\pm$ 50gf	UNIT: mm SCALE:
Life:	20.000 Cycles	DRAWN: Cheng
Taping:		DATE: 2003/12/03
		CHECKED:
		DATE:
		APPROVED:
		DATE:

Wellco T&C Co., Ltd.

