
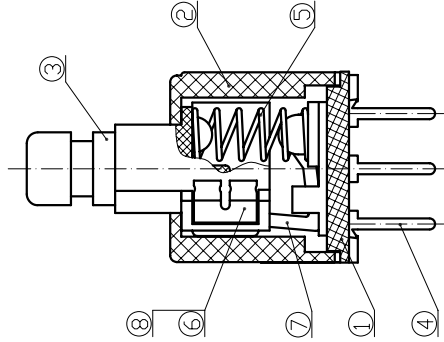
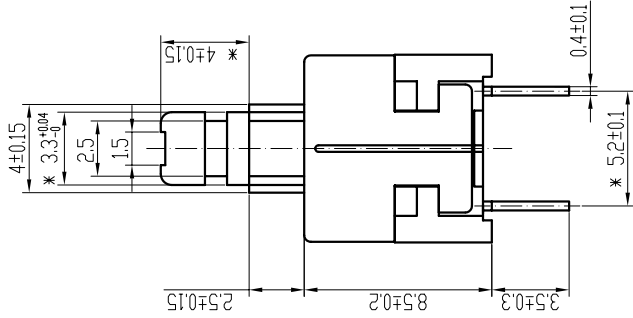

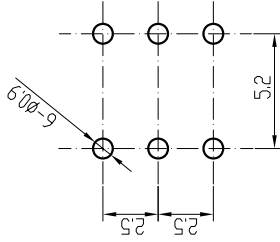


CIRCUIT DIAGRAM

TRAVEL: LOCK STROKE:1.5mm
FULL STROKE:2.5mm

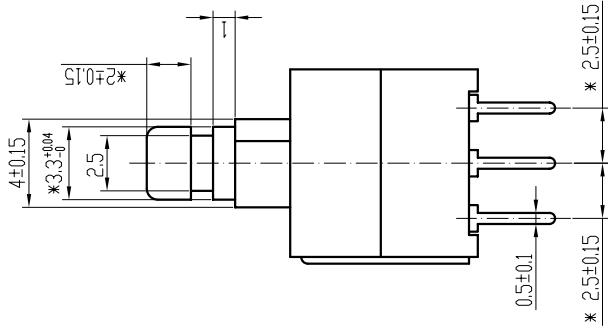

P.C.B DIMENSIONS

8	TET SUPPORT	2	PBT G20 BLACK	ROHS COMPLIANT
7	SELF-LOCK HOOK	1	SPRING STEEL	ROHS COMPLIANT
6	CLIP	2	Ag2/QSn6.5-0.1 t=0.05	ROHS COMPLIANT
5	SPRING	1	65Mn OR STAINLESS STEEL	ROHS COMPLIANT
4	TERMINAL	6	BRASS STRIP	Ag-PLATED, ROHS COMPLIANT
3	PUSH	1	POMK525GR WHITE	ROHS COMPLIANT
2	COVER	1	PBT G20 GREY	ROHS COMPLIANT
1	CASE	1	PBT G20 BLACK	ROHS COMPLIANT
NO.	PART NAME	Q'TY	MATERIAL(THICK,COLOR)	REMARK
D/WN	Y.H.LONG	DATE	2009.11.28	SCALE: 5:1
DSND		DATE		VIEW: 5:1
CHKD	Y.L.JI	DATE	2009.11.28	CAT.NO.
APVD	Y.H.LONG	DATE	2009.11.28	UNIT: mm
Wellco T&C Co., Ltd.				PS-22E85L-EP
				Q/CS.QW-001A-PS-22E85L-EP

Dimensions unless otherwise specified	
Size Range	Tolerance
$L \leq 1$	± 0.15
$1 < L \leq 8$	± 0.20
$8 < L \leq 23$	± 0.25
$23 < L \leq 50$	± 0.30
ANGAL	$\pm 1^\circ$

旧底图总号

底图总号

日期 签名