



TYPE-4A

6: 10u" Au+Sn/Pb
F: 10u" Au+100% TIN

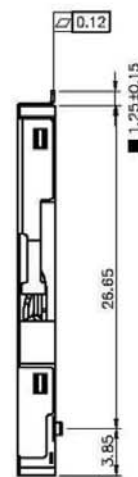


EJECT STROKE

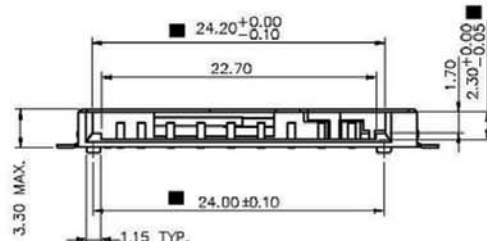

CARD DETECTION	
WITHOUT CARD	CARD INSERTED

WRITE PROTECT SWITCH	
WRITE PROTECTION LOCK	WRITE PROTECTION UNLOCK

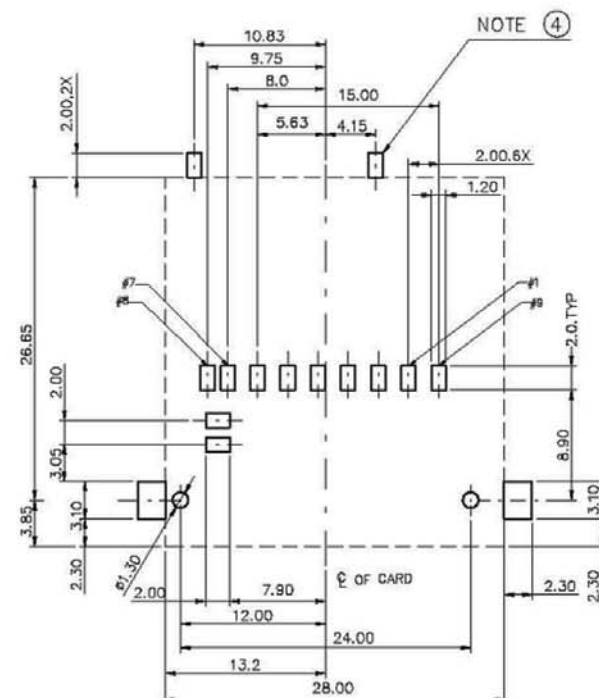

RECOMMENDED P.C.B. LAYOUT

				TOLERANCE (UNLESS SPECIFIED)		MAYL See Note		Wellco T&C Co., Ltd.				
				MM	LINEAR	ANGLES	FINISH	TITLE SD Card Connector(Type4A) push—push,standoff=0				
					0. ±0.3		-----					
					0.0 ±0.2		DATE	2005/04/25				
0.1	ADDED NOTES	J.Wang	APR.10.' 05		0.00 ±0.10	RADIUS	PART NO.	See Note				
0.0	PRELIMINARY	J.Wang	DEC.10.' 04		0.000 ±0.05							
REV.	DESCRIPTION	BY	DATE	DR. BY	CHK. BY	APP. BY	DWG. NO. SDPA—31100—A0X40					
				J.Wang			SHEET	1/1	REV.	0.1	UNIT	mm