


[illegible][illegible]

ROHS

ITEM	PART NAME	MATERIAL	NUM	COLOR	FINISHING	REMARK

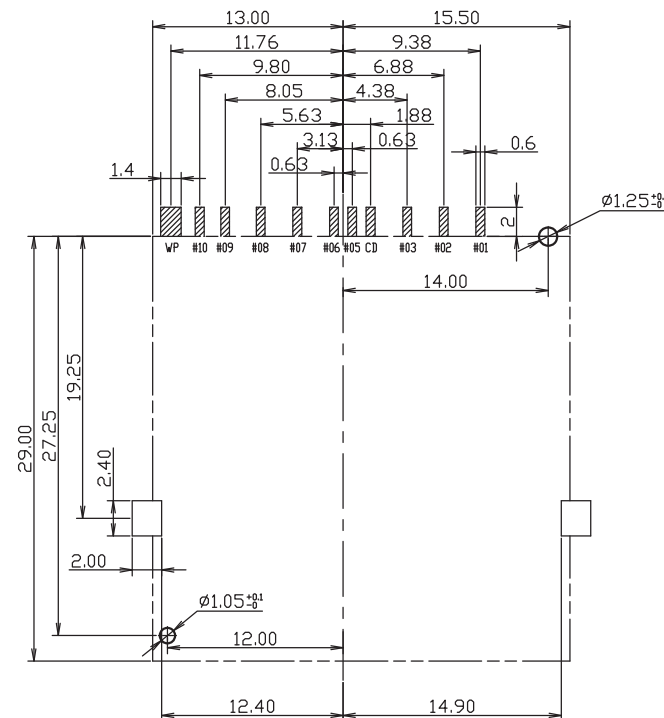

NOTE:

1. ELECTRICAL
2. VOLTAGE:100V AC(RMS) /DC
3. CURRENT:0.5 A AC(RMS) /DC
4. CONTACT RESISTANCE:80 mΩ, max
5. INSULATION RESISTANCE:1000 MΩ, min
6. DIELECTRIC WITHSTANDING VOLTAGE:1000 VAC/RMS
7. OPERATING TEMP:-25° C~+90° C
8. MATERIALS:
 - 8-1. HOUSING:HIGH TEMPERATURE PLASTIC UL 94V-0
 - 8-2. TERMINAL:COPPER ALLOY
 - 8-3. ADDITIONAL OIL:HIGH TEMPERATURE Iubricant
12. MAKED DIMENSIONS NEED BE CONTROLLED IN QIP.
13. 电镀:
 - 13-1. 端子镀环保镍底20~50u",
 - 13-2. 端子焊脚区域镀雾锡50~100u",
 - 13-3. 端子接触区域镀金GOLD FLASH 1u".
14. ONLY FOR SD, MMC CARD.

SD CARD PIN DESIGN			
Pin#	Name	Type	Description
1	CD/DAT3	I/O/PP	card detect/ date lin(bit3)
2	CMD	PP	command/ respouse
3	Vss1	S	supply voltage ground
4	VDD	S	supply voltage
5	CLK	I	clock
6	Vss2	S	supply voltage ground
7	DAT0	I/O/PP	date line(bit 0)
8	DAT1	I/O/PP	date line(bit 1)
9	DAT2	I/O/PP	date line(bit 2)

REV.	REVISIONNOTE	DATE	TOLERANCE	Part No: CS1S-01-A
A	新发行		X. ±0.38 X.* ±4*	Wellco T&C Co., Ltd.
			X.X ±0.25 X.X* ±2*	
			X.XX ±0.20	
			X.XXX ±0.15	
DRAWN	Wesker		PROJECTION	ARTICLE: SD PUSH-PUSH SMT
DES' D				MODEL CS1S-01-A
CHK' D				REV: A
APPV' D			SCALE: 1:1	UNIT: mm SHEET: 2/2