


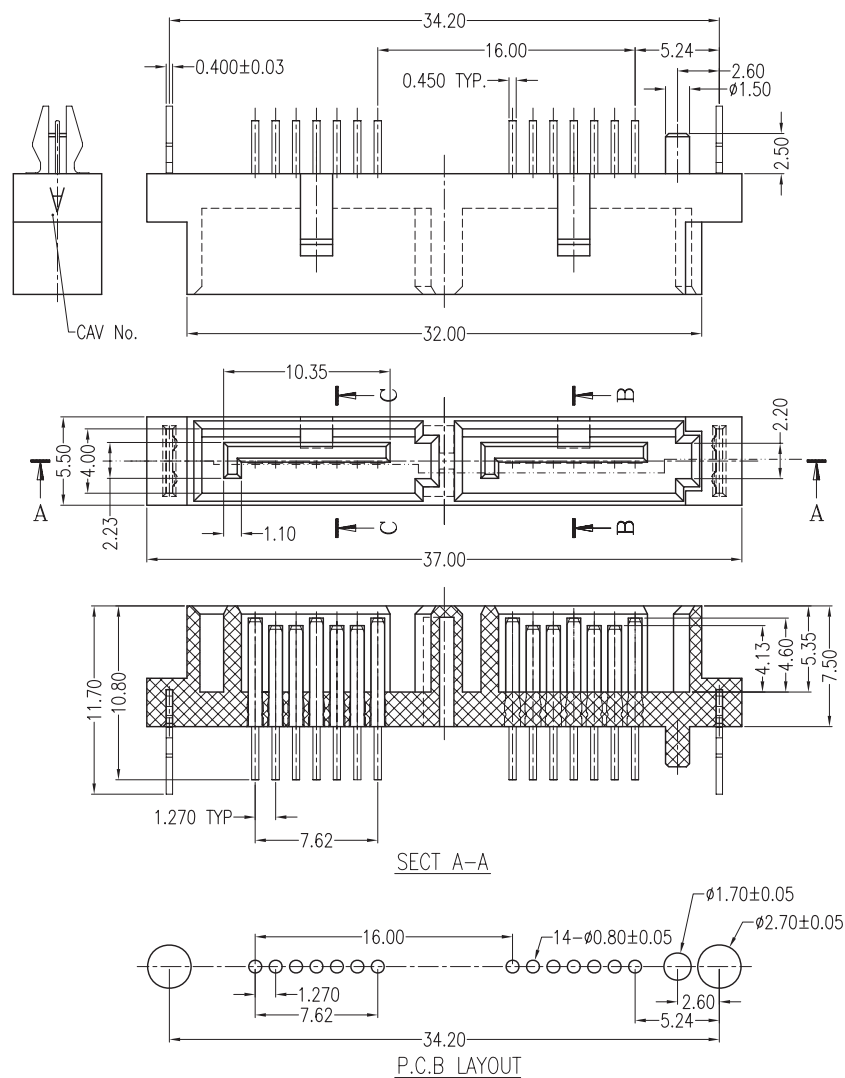

Notes:

*Material

Housing: LCP, UL 94V-0 rated,
Color: Black;
Contact: Brass;
Plating: Gold plating over Nickel on contact
area; Tin/Lead(Tin) plating on terminal.

*Mechanical

Insertion Force: 45N max.
Withdrawal Force: 10N min.
Durability: 500 cycles.

*Electrical Specification

Current Rating: 1.5 Ampere per contact;
Contact Resistance: 30 Milliohms max.
Insulation Resistance: 1000 megohms min.
Dielectric Withstanding Voltage: 500 V AC.

*Environmental

Operating Temperature: -55°C to $+125^{\circ}\text{C}$

*How to order:

WATM-14 D B L D T U:Free Lead Blank:Sn-Pb
D: DIP Type
LCP
Brass
Selective Gold: B:5u" D: 15u"
Number of contacts
Serial ATA for Mother

Units	mm	Scale		Drawing By		Data		Wellco T&C Co., Ltd.							
Tolerance Unless Otherwise Specified				Reviewed By		Data		Date			Title	WATM 7+7P DIP Type Male CRT.			
.X ~ ±0.38				Approval By		Data		Sheet	1 of 1						
.XX ~ ±0.25															
.XXX ~ ±0.20															
Angle ~ ± 3°								Third Angle Projection		Drawing No.	W020621			REV	
											F/Name				
5				6				7				8			