


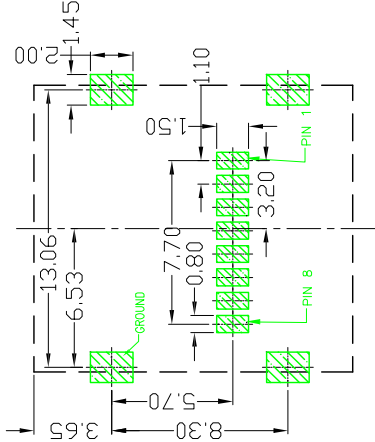
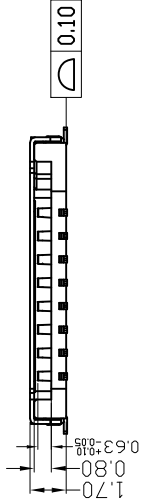
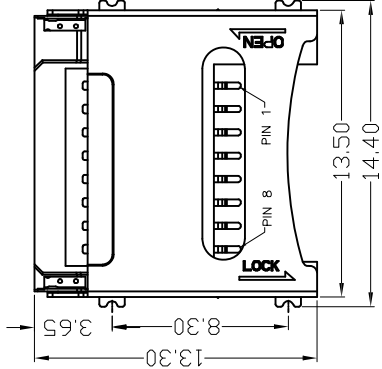


# ROHS

| ITEM | PART NAME | MATERIAL | NUM | COLOR | FINISHING | REMARK |
|------|-----------|----------|-----|-------|-----------|--------|
|      |           |          |     |       |           |        |
|      |           |          |     |       |           |        |

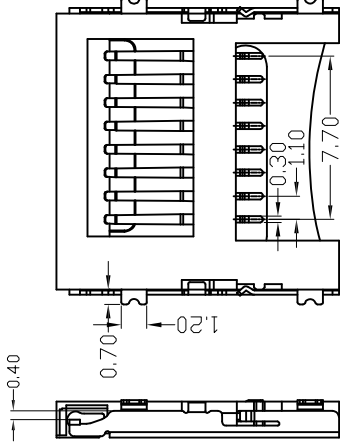

## SLIDE SHELL LOCK

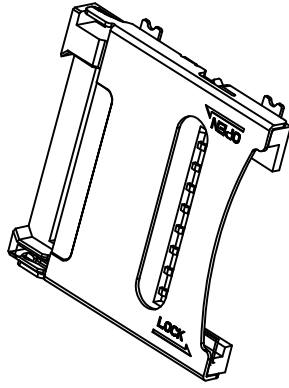

| PIN NO. | NAME    | TYPE   | DESCRIPTION                 |
|---------|---------|--------|-----------------------------|
| 1       | DAT2    | I/O/PP | DATE LINE(BIT2)             |
| 2       | CD/DAT3 | I/O/PP | CARD DETECT DATE LINE(BIT3) |
| 3       | CMD     | PP     | COMMAND RESPONSE            |
| 4       | VDD     | S      | SUPPLY VOLTAGE              |
| 5       | CLX     | I      | CLOCK                       |
| 6       | VSS     | S      | SUPPLY VOLTAGE GROUND       |
| 7       | DATO    | I/O/PP | DATE LINE(BIT0)             |
| 8       | DAT1    | I/O/PP | DATE LINE(BIT1)             |

RECOMMENDED P.C.B HOLE LAYOUT  
COMPONENT SIDE VIEW<TOLERANCE: +/-0.05>

|                          |  |
|--------------------------|--|
| Part No: TFXF2-EBS1-1101 |  |
| Wellco T&C Co., Ltd.     |  |
| ARTICLE:                 |  |
| T-FLASH掀盖卡座-1.7H型        |  |
| MODEL                    |  |
| REV: A                   |  |
| SHEET: 1/2               |  |
| UNIT: mm                 |  |
| SCALE: 1:1               |  |
| APPROV'D                 |  |
| DATE                     |  |
| TOLERANCE                |  |
| X.X ±0.38 X.X ±4°        |  |
| X.X ±0.25 X.X ±2°        |  |
| X.XX ±0.20               |  |
| X.XXX ±0.15              |  |
| PROJECTION               |  |
| Hans Xia                 |  |
| DES'D                    |  |
| CHK'D                    |  |
| APPROV'D                 |  |

注解:

1. 素材要求:
  - 1.1 胶芯:LCP 30%GF, 护火等级:UL94V-0, 颜色:黑色;
  - 1.2 外壳:不锈钢SUS304-3/4H, T=0.20mm
  - 1.3 端子/接地片:磷青铜C5191R-EH, T=0.15mm
2. 电镀要求:
  - 2.1 端子:接触区域镀金1U", 接触区方位锡铜区域镀金1U"其他锡铜区域镀零锡120U", 全部区域镀金10U"
3. 机械性能要求:
  - 3.1 插入力最大4.0kgf.
  - 3.2 拔出力最小0.1kgf.
  - 3.3 耐久插拔5000次循环
4. 电气性能要求:
  - 4.1 额定电压2V<sup>3</sup>.6V
  - 4.2 耐压交流电压最小200伏特, 最少1分钟.
  - 4.3 绝缘电阻在直流电压50伏特时最小100M欧姆.
  - 4.4 接触电阻最大100毫欧.
5. 环境性能要求:
  - 5.1 使用环境-20摄氏度~85摄氏度
  - 5.2 部件耐焊料浸度符合230摄氏度30~60秒, 260摄氏度10秒要求
6. 部件符合RHOS 2005/95/EC.

## 订购须知

