
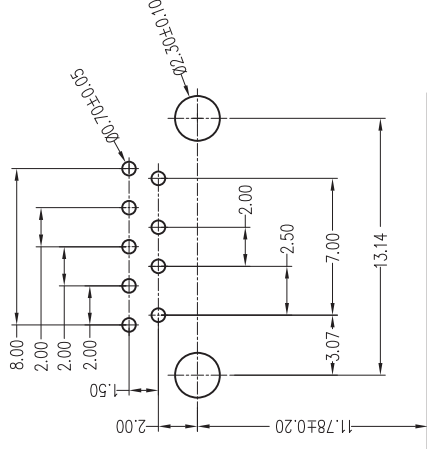
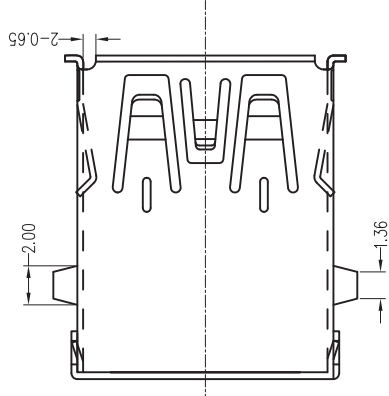
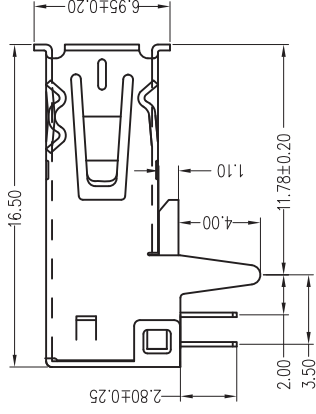


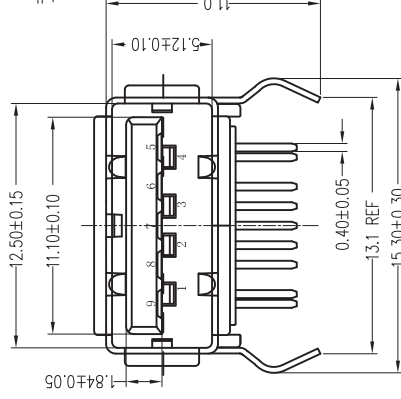

PCB LAYOUT

TOLERANCE: ± 0.05 

USB3A-07XXE002

Contact Finish:
- 00: Material 10: 10u"Gold
01: G/F 15: 15u"Gold
05: 5u"Gold 30: 30u"Gold

Pin #	SIGNAL NAME	DESCRIPTION
1	VBUS	POWER
2	D-	USB 2.0 DIFFERENTIAL PAIR
3	D+	
4	GND	GROUND FOR POWER RETURN
5	StdA_SSRx-	SUPERSPEED RECEIVER DIFFERENTIAL PAIR
6	StdA_SSRx+	
7	GND_DRAIN	GROUND FOR SIGNAL RETURN
8	StdA_SSTx-	SUPERSPEED TRANSMITTER DIFFERENTIAL PAIR
9	StdA_SSTx+	
Shell	Shield	CONNECTOR METAL SHELL

TOLERANCE:		UNIT		Wellco T&C Co., Ltd.			
X. ± 0.50	X.° ± 1°	MM					
X ± 0.30	X.° ± 1°	SHEET					
.XX ± 0.20	.XX° ± 1.0°	1/1					
.XXX ± 0.10		SCALE					
		1:1	SCALE		2010.04.23	P/N: USB3A-07XXE002	ITEM: USB 3.0 A/F DIP 90°(小翻边)
		CHECK:	DESIGN:				
		REV: B	APPR:		Andy		
							DRW NO: CUSB3A-07XXE002

Wellco T&C Co., Ltd.

Δ	ECN109001	增加PIN脚说明			Andy	2011.09.29
LTR	ECN NO	REVISION	RECORD	DRAW	DATE	