
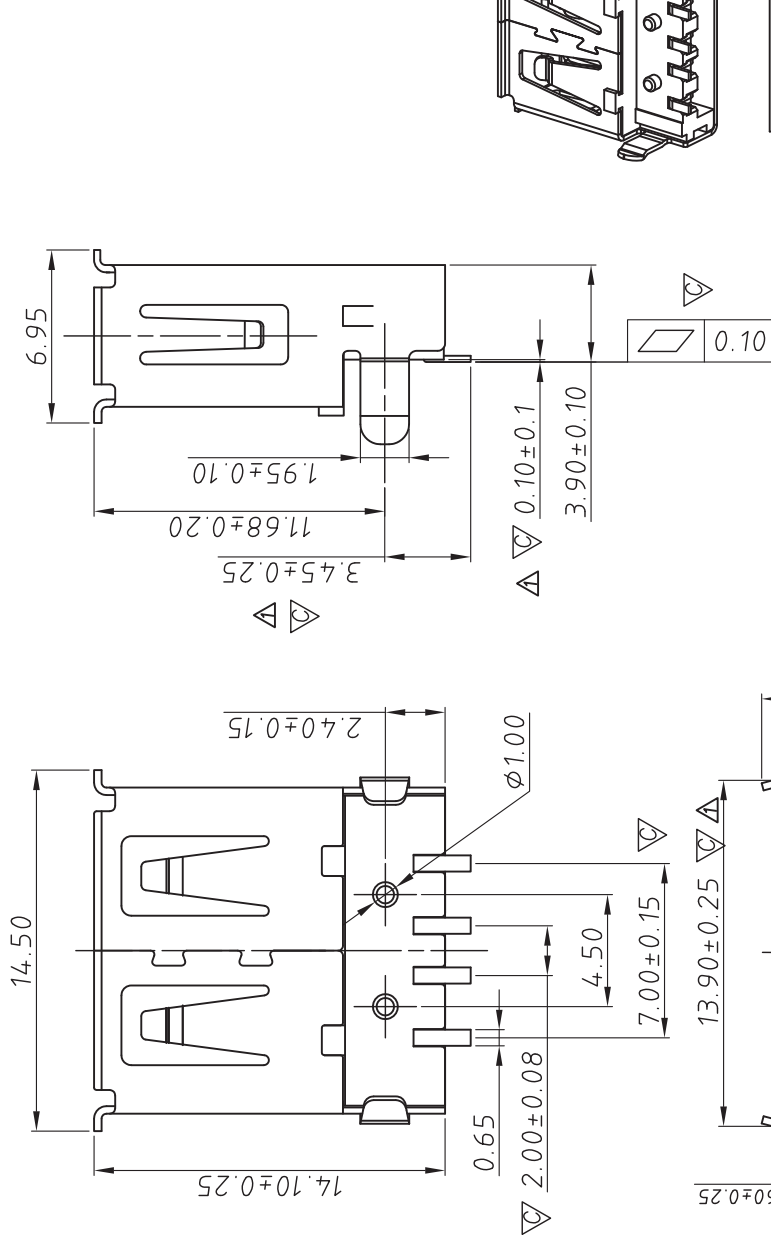


RoHS Compliant

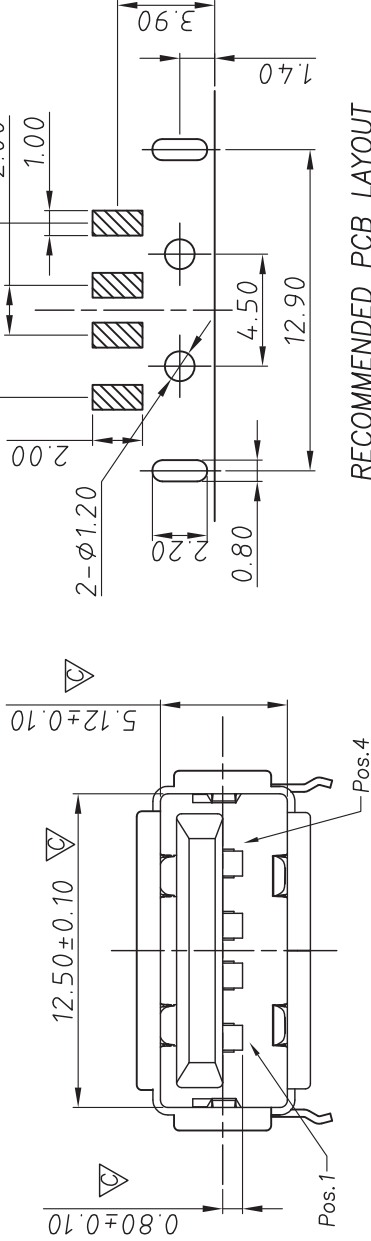


RECOMMENDED PCB LAYOUT

MATERIALS:
Contacts: Bronze, Gold Flash or Gold 30U"/Tin plated.
Insulator: PBT/LCP or NYLON-9T, UL94V-0
Shell: cold Roller Steel or brass, Nickel Plated.
Electrical:
Contact current Rating: 1 Amperes.
Dielectric Withstanding Voltage: AC 500V at sea level.
Insulation resistance: 1000 Megohms Min.
Contact Resistance: 30 Milliohms Max.
Operating Temperature: -55°C to +85°C
MECHANICAL CHARACTERISTICS:
Mating Force: 3.57 Kg. Max.
Unmating Force: 1.02 Kg. Min.

HOW TO ORDER

319AF-X-G0-X-BN
Housing color
W: white
K: black
Rev.
Option of contact plating
1: Gold flash on contact area.
6: Gold 30u" on contact area.

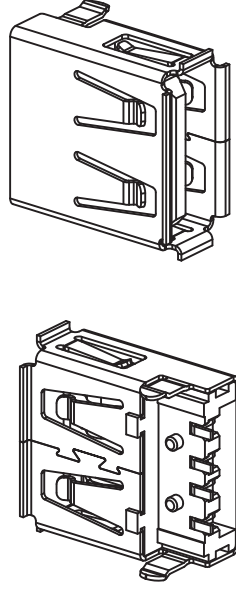

图号 (DWG NO)	G-319-S2-30	单位 (UNIT): MM	Wellco T&C Co., Ltd.	
模号 (MODEL NO)		比例 (SCALE) 1:1	品名 (ITEM NO)	USB-A/F SMT 沉板式
版次 (REV): A/1	页次 (PAGE): 1/1	公差 未注公差 TOLERANCE UNSPECIFIED XX ± 0.15 XXX ± 0.05 XXX ± 0.03 X.XX ± 0.1	料号 (PART NO)	319AFXGXBN
设计 (DESIGN)	审核 (CHECKED)	核准 (APPROVED)		