

规格说明: Specifications:  
电气特性: Electrical:





- 1. 额定电流: Current Rating  
1.5A/contact terminal
- 2. 额定电压: Voltage Rating  
30V DC
- 3. 接触阻抗: Contact Resistance  
30 milliohms MAX
- 4. 耐电压: Dielectric Withstanding Voltage:  
500 V AC AT Sea Level
- 5. 绝缘阻抗: Insulation Resistance:  
1000MEGA ohms MIN

物理性能: Mechanical:

- 1. 插拔力: Connector Mate and Unmate Force  
Mate force: 3.75kgf (MAX)  
Unmate force: 1.02kgf (MIN)
- 2. 端子保持力: Terminal Retention  
1.2kgf (MIN)

原材料: Material:

- 1. 塑胶: Housing:  
Hing Temperature Thermoplastics,  
UL 94V-0 PBT White/Black
  - 2. 端子: Contact: Copper Alloy C2680
  - 3. 外壳: Shell: Copper Alloy C2680/SPCC
- 电镀: Finish:
- 1. 端子: Contact: Plated Gold in Mating Area;  
Tin On Solder Tails
  - 2. 外壳: Shell: Nickel Plating

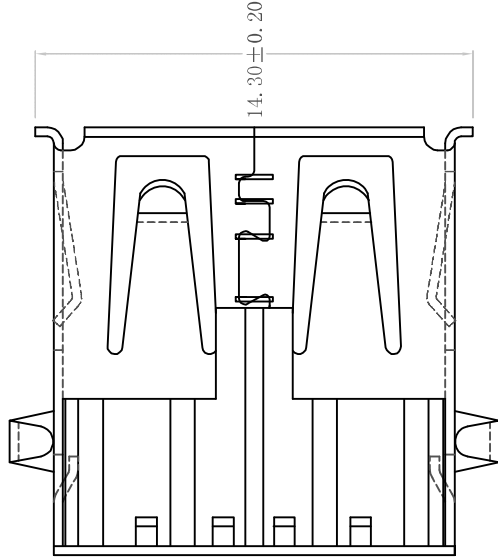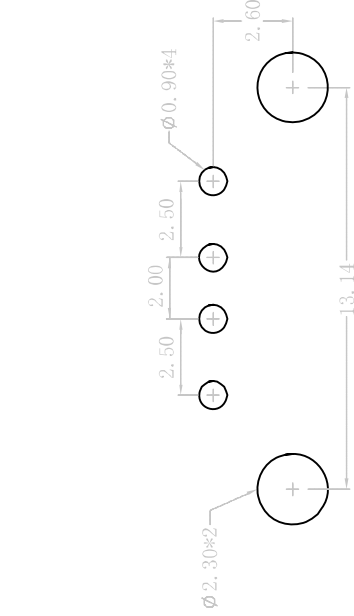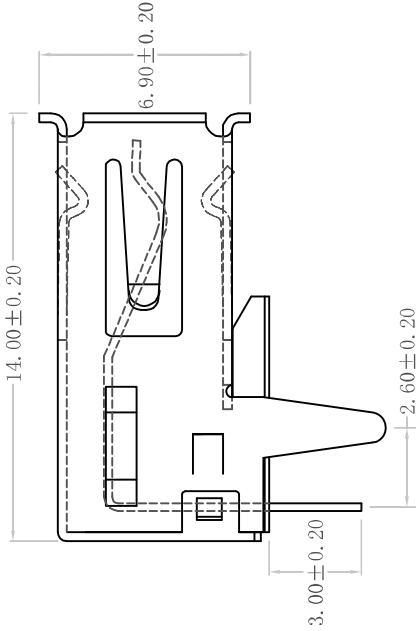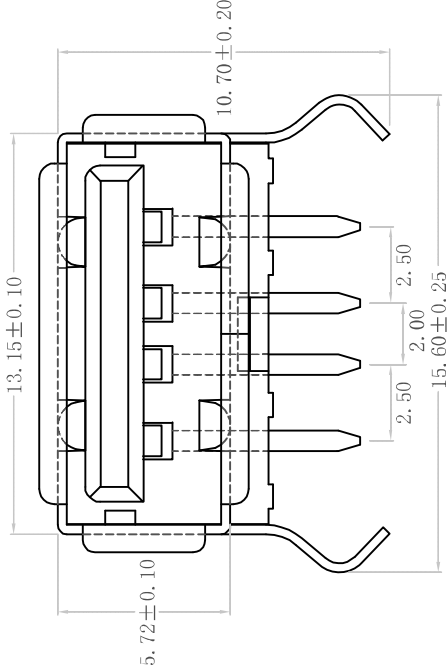

# Wellco T&C Co., Ltd.

品名 (ITEM NO) USB A/F 90°DIP(加盖弯脚)

料号 (PART NO)

模号 (MODEL NO)

CP-IIR001-1D

|               |                |                             |             |              |               |
|---------------|----------------|-----------------------------|-------------|--------------|---------------|
| 图号 (DWG NO)   | 版本 (REV)       | 日期 (DATE)                   | 设计 (DESIGN) | 审核 (CHECKED) | 核准 (APPROVED) |
| A/0           | 2011.08.25     | Ligexin                     |             |              |               |
| 单位 (UNIT): MM | 比例 (SCALE) 1:1 | 公差 (TOLERANCE UNESPECIFIED) |             |              |               |
|               |                | 未注公差                        |             |              |               |
|               |                | X.X ±0.30                   |             |              |               |
|               |                | X.XX ±0.20                  |             |              |               |
|               |                | X.XXX ±0.10                 |             |              |               |
|               |                | X° ±5°                      |             |              |               |