


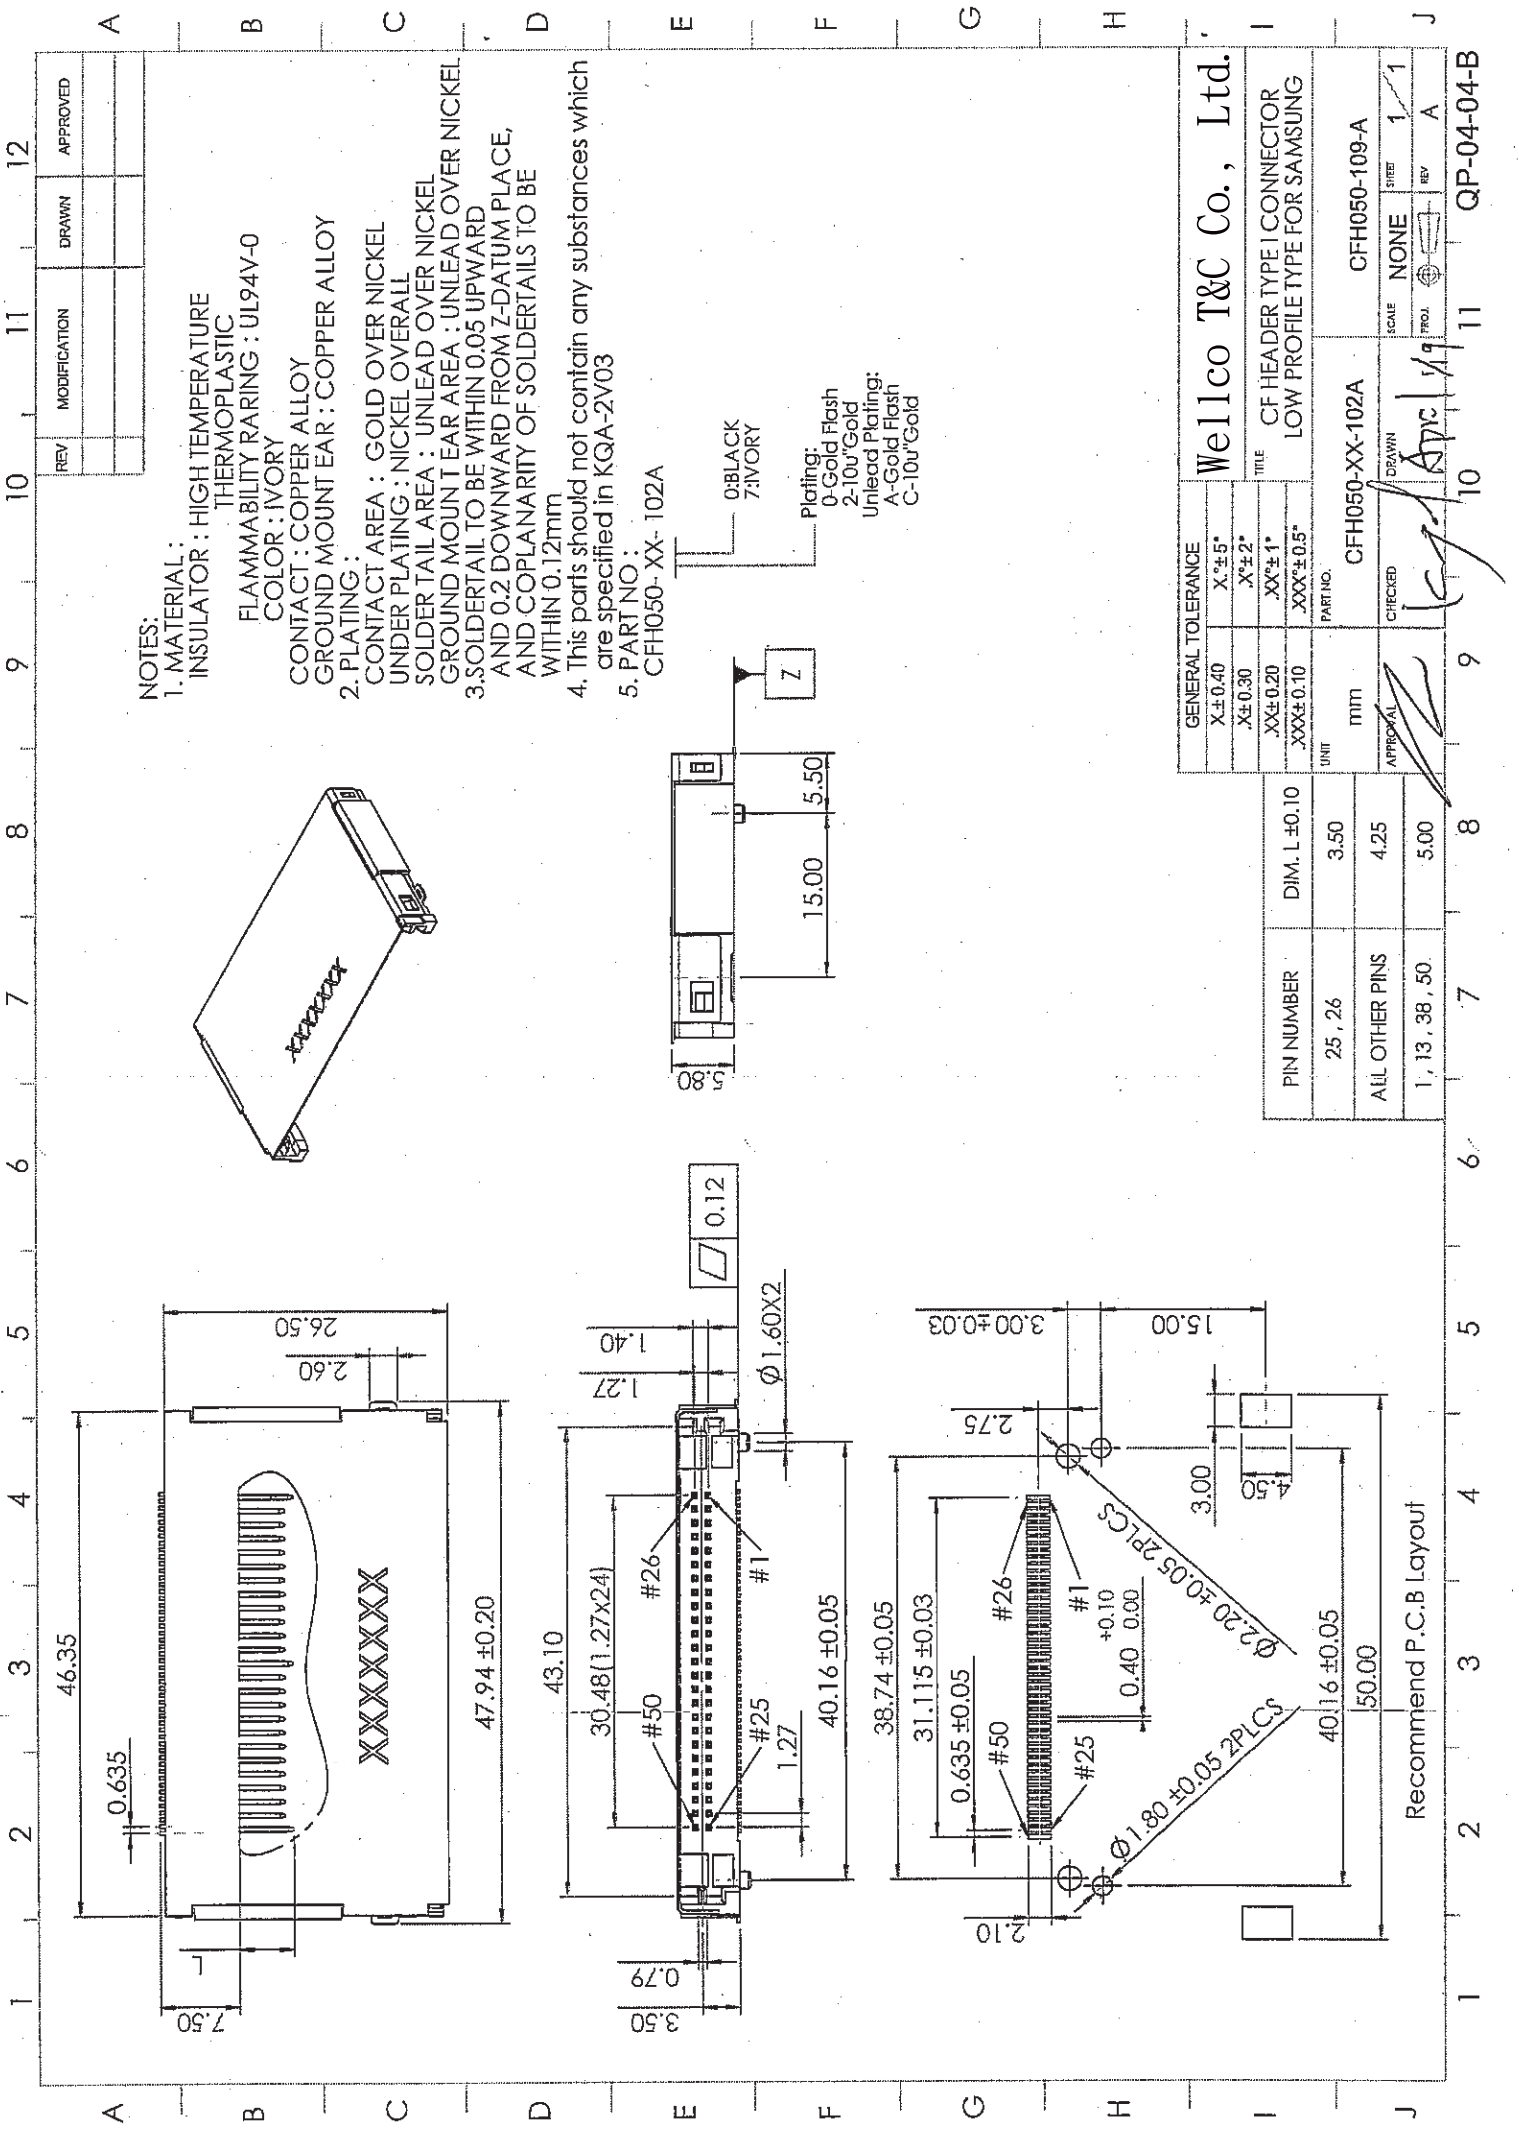

NOTES:

1. MATERIAL:
INSULATOR : HIGH TEMPERATURE THERMOPLASTIC
FLAMMABILITY RATING : UL94V-0
COLOR : IVORY
CONTACT : COPPER ALLOY
GROUND MOUNT EAR : COPPER ALLOY
2. PLATING:
CONTACT AREA : GOLD OVER NICKEL
UNDER PLATING : NICKEL OVERALL
SOLDER TAIL AREA : UNLEAD OVER NICKEL
GROUND MOUNT TAIL AREA : UNLEAD OVER NICKEL
3. SOLDER TAIL TO BE WITHIN 0.05 UPWARD AND 0.2 DOWNWARD FROM Z-DATUM PLACE, AND COPLANARITY OF SOLDER TAILS TO BE WITHIN 0.12mm
4. This parts should not contain any substances which are specified in KQA-2V03
5. PART NO :
CFH050-XX-102A

Wellco T&C Co., Ltd.

CF HEADER TYPE I CONNECTOR
LOW PROFILE TYPE FOR SAMSUNG

GENERAL TOLERANCE		PART NO.	
X $\pm$ 0.40	X $\pm$ 5°	CFH050-XX-102A	CFH050-109-A
.X $\pm$ 0.30	.X $\pm$ 2°		
.XX $\pm$ 0.20	.XX $\pm$ 1°		
.XXX $\pm$ 0.10	.XXX $\pm$ 0.5°		
PIN NUMBER	DIM. L $\pm$ 0.10	UNIT	MITT
25, 26	3.50		
ALL OTHER PINS	4.25		
1, 13, 38, 50	5.00		

Recommend P.C.B Layout

QP-04-04-B